NOTES: UNLESS OTHERWISE SPECIFIED

- 1. LABEL A-10084 YELLOW (PANTANE YELLOW).
- 2. BACKPLATE POLARITY:

CENTER FOIL NEGATIVE (-)
OUTER FOIL POSITIVE (+)


3. ASSEMBLE PACKAGE IN TWO GAS BARRIER BAGS.


1. OUTPUT - (462±170 MICROAMPS) IN AIR AT 25° C, SEA LEVEL.

2. RANGE - 0-25% OXYGEN (MAX), 0-1 PPM OXYGEN (MIN).

3. ACCURACY — WITHIN $\pm 2\%$ OF FULL SCALE AT CONSTANT TEMPERATURE AND PRESSURE.

- 4. RESPONSE TIME
 - LESS THAN 15 SECONDS FOR 90% ON 0-10,000 PPM RANGE
 - LESS THAN 30 SECONDS FOR 90% ON 0-1000 PPM RANGE
 - LESS THAN 45 SECONDS FOR 90% ON 0-100 PPM RANGE
 - LESS THAN 60 SECONDS FOR 90% ON 0-10 PPM RANGE NOTE: WORST CASE, DEPENDS ON INSTRUMENT BEING USED.
- 5. OFFSET LESS THAN OR EQUAL TO ± 1 PPM (IN NITROGEN), VALUE DEPENDS ON THE BACKGROUND GAS AND INSTRUMENT BEING USED.
- 6. HUMIDITY 0 TO 99% R.H. (NON-CONDENSING).
- 7. OPERATING TEMPERATURE RANGE 0 TO 40°C (32 TO 104°F).
- 8. TEMPERATURE COEFFICIENT (2.5%/°C) AT 25°C.
- 9. STORAGE TEMPERATURE 0 TO 50°C (32 TO 122°F).
- 10. EXPECTED CELL LIFE 8 MONTHS IN DRY GAS AT 25°C.
- 11. WEIGHT 0.9 oz. (26 GRAMS).

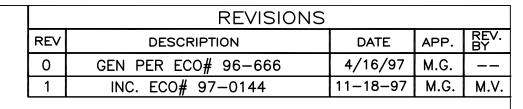

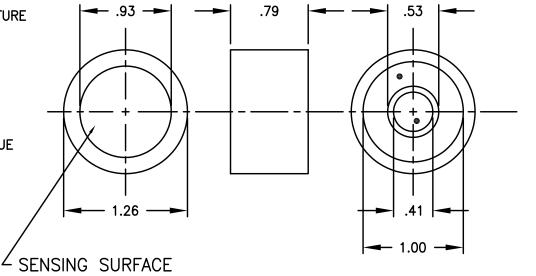

	TITEM QTY PART I			T NO.	DESCRIPTION				
		BILL OF MATERIAL							
	DO NOT SCALE DWG TOLERANCE UNLESS OTHERWISE SPECIFIED: ANGULAR ±1/2*				THIS DRAWING IS THE PROPERTY OF TELEDYNE ANALYTICAL INSTRUMENTS AND CONTAINS CONFIDENTIAL INFORMATION. IT IS NOT TO BE COPIED, REPRODUCED OR USED WITHOUT WRITTEN PERMISSION.				
					Teledyne Analytical Instruments				
	LINEAR $-\begin{bmatrix} X & = \pm .1 \\ XX & = \pm .02 \\ XXX & = \pm .005 \end{bmatrix}$			$= \pm .1$ $= \pm .02$	A business unit of Teledyne Electronic Technologies CITY OF INDUSTRY, CALIFORNIA 91748				
				$X = \pm .005$					
	s	IGNATU	RES	DATE	TITLE	0050 001	ITD OL DIVIO	SCALE NONE	
N/	DRFT:	JOHN	REYES	07/22/96		SPEC. CON	NTROL DWG.		
P/	CHK:					MICRO F	UEL CELL	SIM NONE	
1/	APPR:							SHEET 4 OF 4	
F/	ENGR: M. GONZALEZ			Z		CLASS B2C		1 OF 1	
0/	S.O.:				MATL.	NOTED	DWG NO.		
REFERENCE	CAD I.D. A66797-1				112,425		A-00/9/1		