


## Airtec Pneumatics

Garanti: 12 ay  
Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin [info@yursat.com.tr](mailto:info@yursat.com.tr) e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz.  
**Airtec Pneumatics** Markası, tedarik sresi iin ltfen bizimle iletiŐime geiniz.

*Firmamız Airtec Pneumatics Trkiye Distribtr veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.*

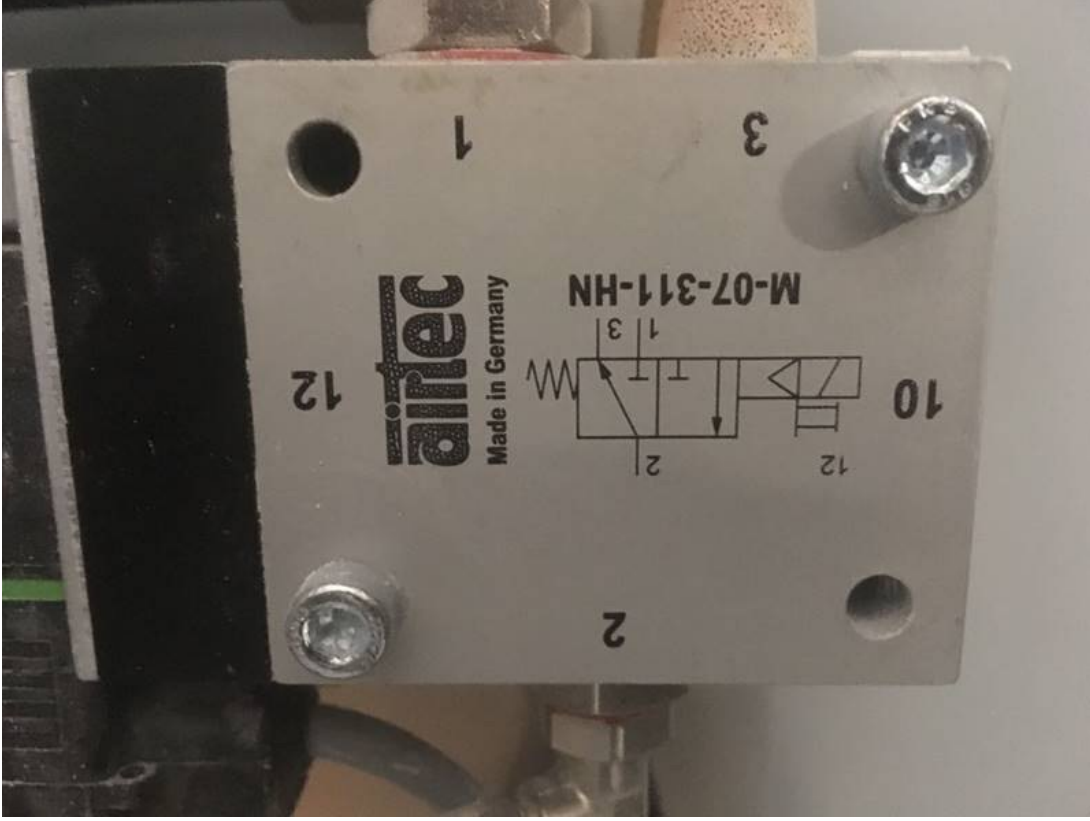

rn	Aıklama
<a href="#">MN-06-520-HN-442</a>	electrically operated piston valve MN-06 series 5/2-way, bistable NAMUR connection diagram G1 / 4, NW 6 mm Detenting manual override, opposite 1, 3 and 5 Working pressure: 2... 10 bar Temperature range: - 10 ° C... + 70 ° C
<a href="#">RP 1 1/2" Katolog No: ART NR: Y 112 ES</a>	
<a href="#">MS-18-310-HN-412</a>	electrically operated seat valve MS-18 series 3/2-way, monostable, closed rest position Mechanical spring return G1 / 8, NW 1.4 mm Manual override latching 24 V DC, 4.2 W. Working pressure: -0.95 ... 10 bar Temperature range: -10 ° C... + 70 ° C
<a href="#">PE-14-01-050</a>	
<a href="#">E-18-310</a>	mechanically operated piston valve Series E-18 3/2-way, monostable actuation plunger Mechanical spring return G1/8, NW 4mm Working pressure: 0... 12 bar Temperature range: -10°C... +70°C
<a href="#">M-07-0311-HN</a>	
<a href="#">XL-080-0600-050</a>	Dubbelwerkende profile cylinder, D=80 S=600 ISO1552, Magnetic puller, adjustable damping, hard chrome-plated pull rod M20x1.5
<a href="#">VS-XL-080-01</a>	sealing set XL-080 (1 piston, 1 wiper, 2 damping rings, 2 O-rings and 30 g. grease
<a href="#">FLOOR STRIPPER NA-6280</a>	

[FLOOR STRIPPER NA-7700](#)

[solenoid valve](#)

[M - 07 - 311 - Hn - Ventil](#)