


Althen

Garanti: 12 ay
Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin info@yursat.com.tr e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz. **Althen** Markası, tedarik sresi iin ltfen bizimle iletiŐime geiniz.

Firmamız Althen Trkiye Distribtr veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.



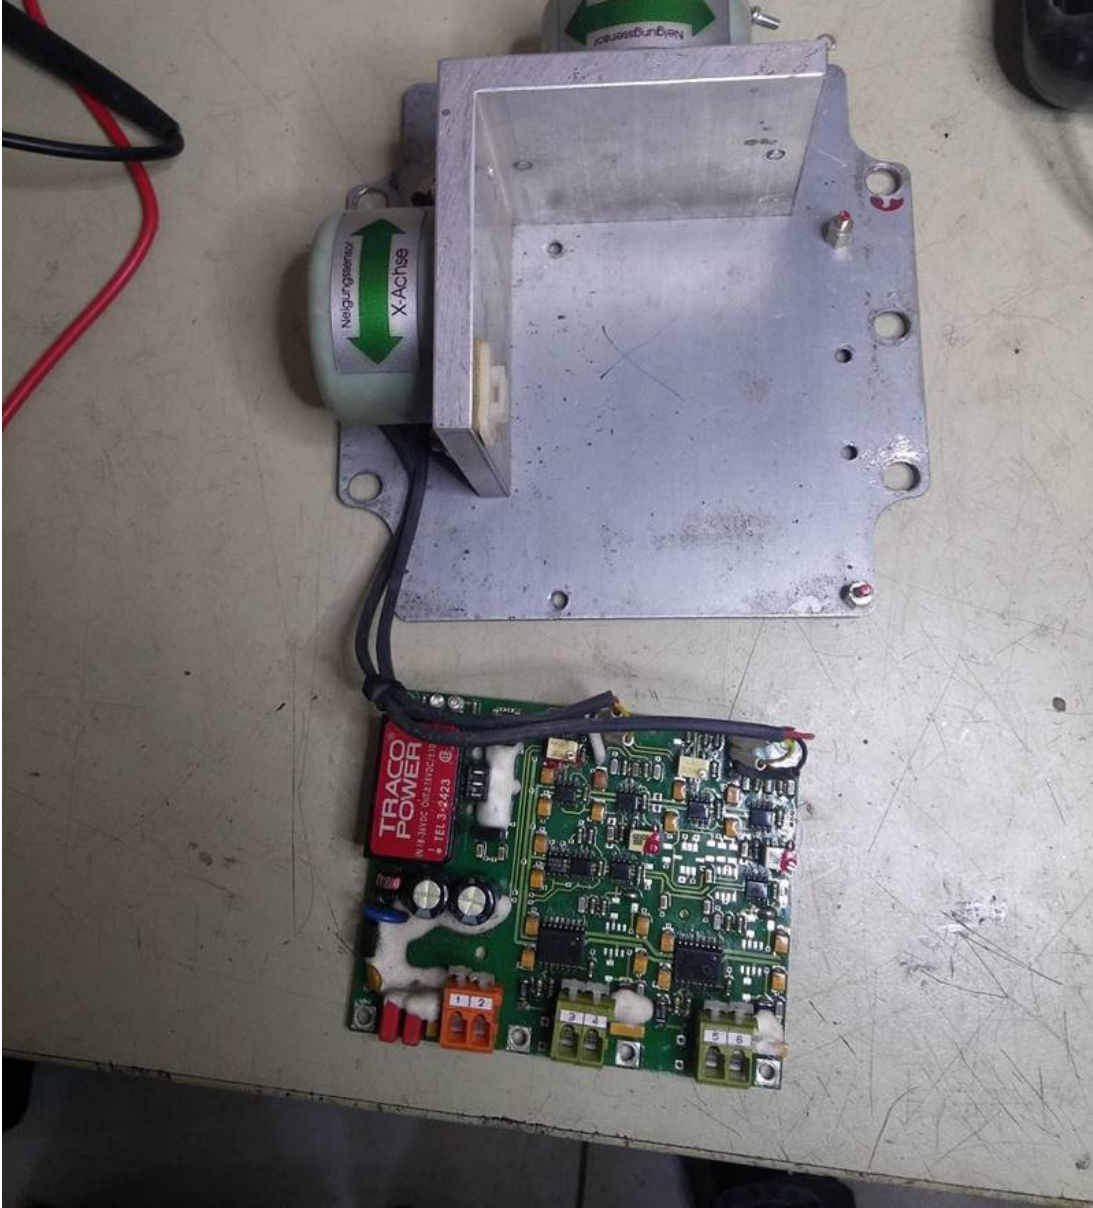

¼r¼n	Açıklama
DSA3217-PTP/16APx-30psiA 16-channel	Pressure Module with Absolute sensors with Precision Time Protocol (SET)
12HPS-5	Multi-Turn Potentiometer
KD - 1925 and KD 1950	For the first region: Ambient temperature of 150 – 170 °C, · The same temperature values are valid for the sensor cables, · The material to be measured is Ti6-4, · Extremely small sensor sizes are required as they will be positioned in tight spaces. For the second region: Ambient temperature of 150 – 170 °C, Ambient temperature of approximately 600 – 700 °C for sensor cables, · The material to be measured is Inco 718, · Small sensor dimensions.
SAK. 13FLP100A /POTENTİOMETRE	

LCF-300-LP-30	1010564 Precision inclinometer - Measuring range / number of axes: $\pm 30^\circ$ / 1-axial (Code: 30) - Accuracy: 0.02% FSO - Output signal: 4 - 20 mA, 3-wire technology (code: L) - Supply voltage: 20 - 30 VDC - Service temperature: -40°C to $+80^\circ\text{C}$ - Electrical connection: Solder pins (code: P) Further specifications according to data sheet Dual use listed. Identification number: 7A101
H30JH 3-Axis Finger Joystick	
NM1-M1-IP-24E-420-B20-GFM	Industrial inclinometer system - Measuring range / number of axes / direction of rotation: $\pm 20^\circ$ / 1-axial / bi-directional (Code: B20) - Output signal: 4 - 20 mA, 2-wire (code: 420) - Supply voltage: 10 - 30 VDC (Code: 24E) - Electrical connection: 3 m connection cable 2 x 2 x 0.25 mm ² PUR - Degree of protection: IP66 - Execution: base mounting (code: GFM) Further specifications according to data sheet
NM1-IP-2L-24-420-B20	Industrial inclinometer system - Measuring range / number of axes / direction of rotation: $\pm 20^\circ$ / 1-axial / bidirectional (code B20) - Output signal: 4 - 20 mA, 2-wire (code: 420) - Supply voltage: 18 - 28 VDC - Electrical connection: 3 m connection cable 2 x 0.25mm ² (AWG20) - Degree of protection: IP68 - Electronics to protect against moisture and shedding vibrations Further specifications according to data sheet
LMP-35-2L-50kN-Z4933	Load measuring pin special design - Measuring range / type of force: 50 kN / compressive force - Accuracy: $\pm 1.0\%$ of full scale - Output signal: 4 - 20 mA, 2-wire technology - Supply voltage: 7.5 VDC to 28 VDC - Service / nominal temperature: -25°C to $+80^\circ\text{C}$ / -10°C to $+50^\circ\text{C}$ - Electrical connection: Souriau connector with Connection cable set, cable length 5 m - Mechanical connection: according to drawing - Degree of protection: IP67 Further specifications according to data sheet
TOG-2L-15to-Z4935	Customized strain gauge tension transducer - Measuring range / type of force: 15 t / weight - Output signal: 4 - 20 mA, 2-wire - Supply voltage: 24 VDC - Electrical connection: Souriau connector with Connection cable set, cable length 3 m - Material: stainless steel Further specifications according to data sheet and drawing (will be created again)
TTL-20t-Z4936	Tension gauge special design - Measuring range / type of force: 20 t / tensile force - Accuracy: $\pm 0.25\%$ of final value - Output signal: 4 - 20 mA, 2-wire technology - Supply voltage: 7.5 VDC to 28 VDC - Service / nominal temperature: -20°C to $+70^\circ\text{C}$ / -10°C to $+50^\circ\text{C}$ - Electrical connection: plug connector with Connection cable set, cable length 5 m - Mechanical connection: according to drawing - Degree of protection: IP66 Further specifications according to data sheet
TTL-25t-Z4962	Tension gauge special design - Measuring range / type of force: 25 t / tensile force - Accuracy: $\pm 0.25\%$ of final value - Output signal: 4 - 20 mA, 2-wire technology - Supply voltage: 7.5 VDC to 28 VDC - Service / nominal temperature: -20°C to $+70^\circ\text{C}$ / -10°C to $+50^\circ\text{C}$ - Electrical connection: plug connector with Connection cable set, cable length 5 m - Mechanical connection: according to drawing - Degree of protection: IP66 Further specifications according to data sheet
LSOP-30	Analog Inclinometer Range: ± 30 Degree, ± 15 mA, Us: 10-24VDC, Output: 4-20mA
LSOP-30-ROHS	1011192 Precision inclinometer - Measuring range / number of axes: $\pm 30^\circ$ / 1-axis (Code: 30) - Accuracy: (NLH) $< \pm 0.02\%$ of full scale - Resolution/response threshold: 1 μrad - Output signal: $\pm 5\text{V}$ proportional to the sine of the tilt angle - Supply voltage: ± 12 to ± 18 VDC - Temperature of use: -20°C to $+70^\circ\text{C}$ - Electrical connection: Solder terminal (Code: P) Further specifications according to data sheet
1011200	13FLP100A-5K-M-0.7 linear potentiometer - Measuring range: 101.6 mm ± 0.5 mm (code: 100) - Non-linearity: $\pm 0.7\%$ (code: 0.7) - Resistance: 5 kOhm (Code: 5K) - Resistance Deviation: $\pm 20\%$ (Code: M) - Rated power: 1.2 watts - Mech. Connection: 4x through-holes on the housing Further specifications according to data sheet

Project	we need a joystick with 2 axis data from the "Althen" brand and a button on the Z axis. Communication protocols such as USB, RS232, RS485 will be suitable. Is it possible for you to suggest a product and price offer according to these requirements? If there is no model that you can suggest, can you submit an offer for the following products? HE1 Multi-Axis Finger Joystick HE2 Multi-Axis Finger Joystick HE3 Multi-Axis Finger Joystick
Pptr40gp5vbef	
Sg-Kp-24e-010	
Pptr100gp5vbef	
850904-D003	
40 07 Y19	
Althen-Dichtring-F3;R-Xpc10-M-10ba-L3mz02-Istanbul-Turkiye	
Nm2-4l-24-B10-15-E-T	
Dichtringe Zjoibs003	
Ags4003-350-G	
M/N:Kd2300-5su S/N:S0305282-02-10	
Sg-Ks	
Aaa223-0001-Xxg	
Nm2-4l-24-020-15-E	
Ags4003-100-G	
76066753040103	
M/N:Kd2300-5su S/N:S0305282-02-10 Kaman	
P981-0107-06m0	
125hcd-006	
Nss1-1p-24e-5-2gw	
F306-Cfr0h0-005	
Xpc10-M-10ba-/L3m/Z02	
Nss-1-1p-24e-B5-2gw	
Nss-1-1p-24e-5-2gw	
Rd298hpt	
Hi2010e024-Sg-2k-E0112	
Paxp001b	
Ags4003-M-0400-Ab	
A-K-1k	
X103.10ajntz329	
Hi2013-0350-Ab-E054	
P500.120ej	

[Sg-İp-3İ-24-420-2p](#)

[Aosbka-500](#)

[Sg-İp-24e-420](#)