


Chelic

Garanti: 12 ay
Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin info@yursat.com.tr e-posta adresine baŐuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz. **Chelic** Markası, tedarik sresi iin ltfen bizimle iletiŐime geiniz.

Firmamız Chelic Trkiye Distribtr veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.

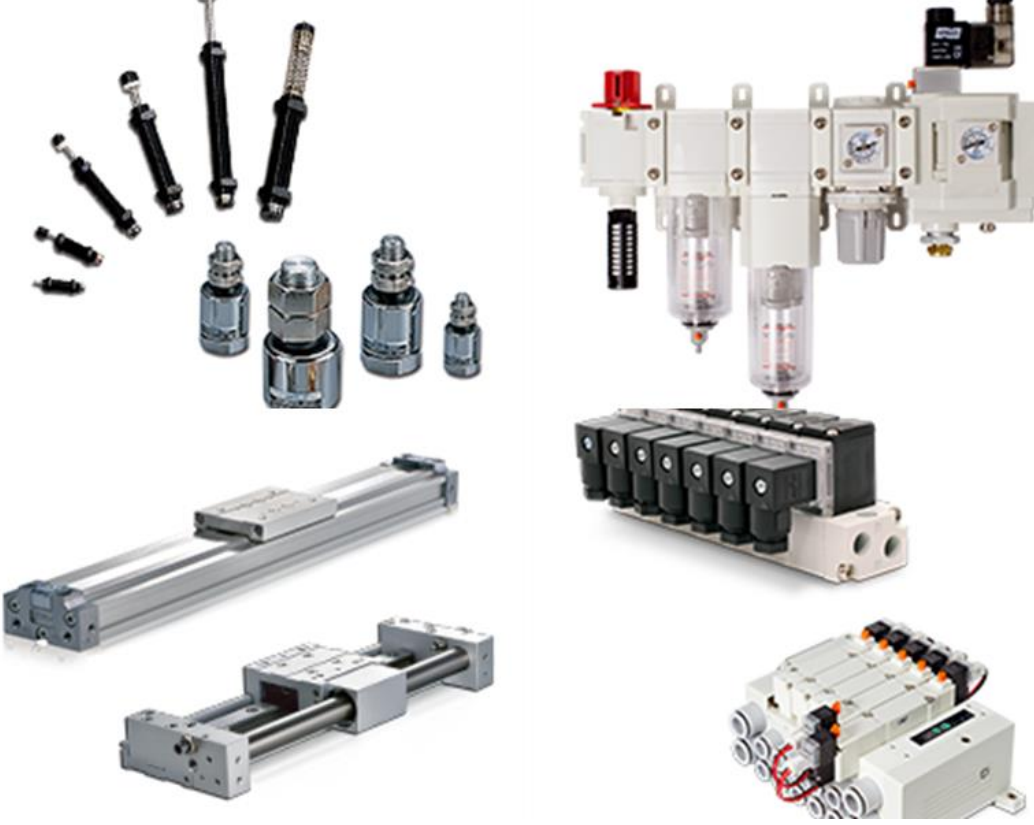

rn	Aıklama
Dbt25x50	Piston (Chelic DBT 2550 Double Shaft Block Cylinder)
Dbt40x50	iston (Chelic DBT 2550 Double Shaft Block Cylinder)
NA12x05-B	
SV6202-G-24Vdc-K	Solenoid valve 1/4" (P-A-B); 1/8" (R-S); G parallel threads version
SV6102-G-24Vdc-K	Solenoid valve 1/4" (P-A-B); 1/8" (R-S); G parallel threads version;
NQ16x30-S	
HVM-404	Hand operated valve, 1/2" size, 4 ways 3 positions, centre closed.
CS9D	Magnetic sensor switch, reed type, 2 wires, cable 2 meters longue.
SV 6102 220 V AC	SV-6102-G-220Vac-K G as parallel female threads for P, R,S, ports, instead of conic threads, You ca use parallel and conic male thread fittings to mount on.
SV 6102 24 V DC	SV-6102-G-24Vdc-K
SV 6202 S2 14 24 V DC	
SV-6102-G-220Vac-K	G as parallel female threads for P, R,S, ports, instead of conic threads, You ca use parallel and conic male thread fittings to mount on.
SV-6102	

SV-6102-G-24Vdc-K	- G as parallel female threads for P, R,S, ports, instead of conic threads, You ca use parallel and conic male thread fittings to mount on. - K as rectangular DIN connector, no led - K-L as rectangular DIN connector, with Led, to be added 1,20€ on indicated price: 27,309€ single net price.
TD16x25	
SK-5101-24Vdc-L (T)	
CS50F	
CS9D-PNP-PG	
CS80B	- Composed of sensor holder bracket 80F and - CS9D-2MT Magnetic sensor reed type, w/led, 2meter bipolar cable,
SOLENOID VALVE SV 6202-K-L DC 24V	MAX PRESS 135 PSI
Cj-M10x.1,25	
Nfld300-02-S-F2-Pr10	
Jd 20x10-B-Sd2	
Sfu 03210 Somun G¼vdesi	
Dbs 25-125-Sa2	
Nf100-01	
Nfld300-02-Lg-H	
Nfld300-02-Mg-H	
Nfld200-02-Ta-H-Pr10	
Sum-40-Dc24v	
Sv6102-G-24vdc-K	SOLENOID VALVE 5 Ways, 2 Positions, 1 COIL 24Vdc, 2,5W, Rectangular DIN connector, Air/Spring return, Size 1/4" (P;A;B // 1;2;4) ports & 1/8" (R;S //3;5) ports, G parallel threads version (standard), RC conic threads on request.
Nfld300-02-Mg-A-Pr10	
Cs-9d-Pnp	
Sv6102-24vdc-K-L	
Nfld300-02-Lg-S-Pr10	
Nfld300-02-Mg-S-Pr10	
Nfld300-02-H-F1-Pr10	
3d Dn 40x100 Piston Strok 100mm	
Md X12x50-Sd2-Am2	
Nfld300-02-H-F1	
Nfld300-02-H-Pr10	
Nq 10-5-Sd2	
Nfld300-02-Lg-S-F2-Pr10	
Nfld200-02-Ta-Bg-A-Pr10	
Rth63/180f	

Tsb-32-50-Am2	
Nfld300-02-Lg-A-Pr10	
Md X20x100-Sd2-Bm2	
Tb40x175	
Nfld200-02-Ta-Bg-H	
Nfld200-02-Ta-Bg-F1-Pr10	
Nfld200-02-Ta-Bg-A	
Nfld200-02-Ta-H	
Sda32x320-C	
Tsb-63x50-Am2	
Jd20*45-B	
Sv-6102	Chelic solenoid valve selenoid valf 24V DC
Sr5-10-1-C4-L-24-M2	
Nfld200-02-Ta-Bg-F1	
Nr-100-01	
Bfr300-S	
Tsb-20x75-Am2	
Hvm-403	
Nfld300-02-Lg-H-F1-Pr10	
Bfr 200 H	
Sv6102-24vdc-K-L-M2	
Bfr200 (Plastic Bowl)	
Fda20x100	
BI300	
Nfld300-02-H	
Nfld300-02-S	
Jtd 32 Piston Strok 30mm	
Cs30e Pnp	
Tsb-32x25-Am2	
Nfld300-02-Lg-S	
Nfld300-02-Mg-A	
Sv-6232 Dc24v-L	
Nfld300-02-S-F2	
Hds-20	
Jtd 20 Piston Strok 30mm	
Sr5-10-1-0-L-24	

Nfld300-02-Mg-S
Cfr 400 Hf1
Bfr300-A
Bf 20 Vidali Mil Tutucu
Bk 20 Vidali Mil Tutucu
Tu63x50
Nfld200-02-Ta-Bg-H-Pr10
Nfld300-02-Lg-S-F2
Nfld300-02-Lg-H-Pr10
Jd12*20s
Spab 6-01
Nfld200-02-Ta-A-Pr10
Nfr300-02-N-A-F1
Nfld300-02-Lg-A
Nfld300-02-Mg-H-Pr10
Rth 63/090-F
Nfld200-02-Ta-A
Sda25*100-C
Sad-1410n
Tsb-50x75-Am2
Nfld300-02-Lg-H-F1
Spab 6-M5
Sda32*320-C