


Haake

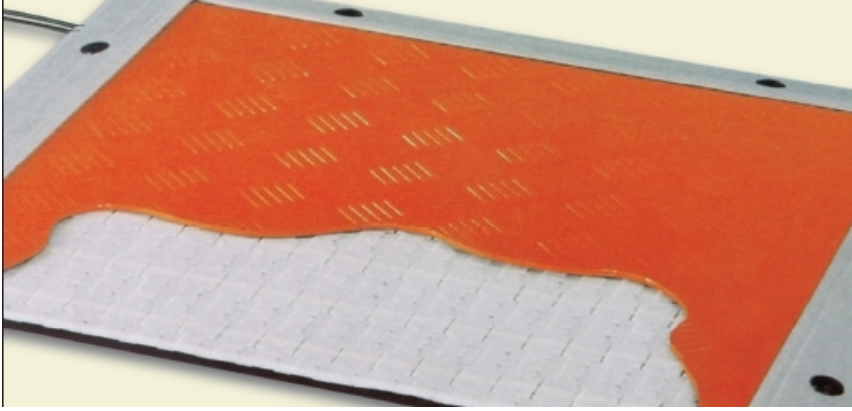

Garanti: 12 ay
Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin info@yursat.com.tr e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz.
Haake Markası, tedarik sresi iin ltfen bizimle iletiŐime geiniz.

Firmamız Haake Trkiye Distribtr veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.

rn	Aıklama
HSC B-40 (1210mmx40mm) Safety Edge	
HSC B-40 (738mmx20mm) Safety Edge	
HSC B-40 (165mmx20mm) Safety Edge	
HSC B-40 (2000mmx40mm) Safety Edge	
011-0800	
10223	
222-1693	
227440 - OEM	
399-0112	
60053 / VC0000914	
60056 / VC0001793	
60059 / VC0023834	
60059 / VC0023836	
60060 / VC0023837	
60066	
60213 / VC0008152	

808-0732	
808-0753	
AC200-G50 230V/50Hz	
C1	
C270-030-0041	
EDGE HSC 65-35-01 in length of 2700mm	
HSC 40-20-01	
HSC 40-20-02 OEM	
HSC 95-35-02 T	
HSC65-03-2600	
HSM	
HST-TS1	
HST-TSS1	
MT 556-0025	
Spindle for VT02 Plus	
V1	
VT 550	
WK45	
60054 / VC0001746	Switch element HST-SE1 Weight in kg: 0.47098 Design: Installation Ø 5.5 mm Number of locks: 1 Current: 20A Contact assignment: 2NC2NO with the operating key inserted: no Caption: H
HSC95-35-01T	
FVHSC653503T 350mm	
FVHSC40-20-03T 500mm	Rechts+Links
HSC 40-20-01 T	VC0046026 60058 Weight in kg: 1.19017 Sensing edge length [mm]: 1000 Aluminum profile surface: untreated Location of the cable exit: front right Type of cable exit: 2 x grommet x dimension right for cable outlet [mm]: 50.0 Cable length [mm]: 1000 Type of attachment: threaded bolt M8 x 18 mm a dimension [mm]: 50.0 b dimension [mm]: 450.0 c dimension [mm]: 50.0 Number of attachments: 3 Anti-slip device: no
	Safety edge HSC 40-20-01 T Weight in kg: 2.12845 Length of safety edge [mm]: 2100 Aluminum profile surface: untreated Location of the cable exit: front right Type of cable exit: 2 x

HSC 40-20-01 T (VC0046028)	grommet x dimension right for cable outlet [mm]: 50.0 Cable length [mm]: 1000 Type of attachment: threaded bolt M8 x 18 mm a dimension [mm]: 50.0 b dimension [mm]: 400.0 c dimension [mm]: 50.0 Number of attachments: 6 Anti-slip device: no
HSC 40-20-01 T (VC0046027)	Gewicht in kg: 1,6208 Länge der Schaltleiste [mm]: 1500 Oberfläche des Aluminiumprofils: unbehandelt Lage des Kabelausgangs: vorne rechts Art des Kabelausgangs: 2 x T¼lle x-Maß rechts für Kabelausgang [mm]: 50,0 Leitungslänge [mm]: 1000 Art der Befestigung: Gewindebolzen M8 x 18 mm a-Maß [mm]: 50,0 b-Maß [mm]: 350,0 c-Maß [mm]: 50,0 Anzahl der Befestigungen: 5 Rutschsicherung: nein
60056 / VC0001788	Switch element with locking device HST-ME2 Weight in kg: 5.45239 Design: Installation Ø 5.5 mm Power supply: 24 VDC Contact assignment: 2NC2NO Number of locks: 2 with the operating key inserted: yes Labeling:
60056 / VC0001807	Switch element with locking device HST-MA2 Weight in kg: 11.16799 Design: construction steel Power supply: 24 VDC Contact assignment:
Thermostat bath (230 V/50 Hz), -20 to +150 °C	<ul style="list-style-type: none">• High-class thermostat with excellent temperature stability• in combination with the aluminum blocks for sample preparation.• Digital temperature setting via front panel.• Temperature range: -20°C to +150 °C• temperature stability: ±0.03 °C• size (W x D x H): 23 x 39 x 65 cm.• bath opening (W x D)/bath depth: 13 x 15 cm / 15 cm,• bath volume: 3 - 4 lNote: • Please order the matching aluminum blocks for sample tube tempering separately.
Hsc 65-35-03 T	
Typ 1862-00	
904-04185	
Hsc 3-05 L=446 Cod Swisslog 506269	
Hsc400301/02	
222-1693 Calibration To A Measuring Accuracy Of +/- 1% Fsd	
H-399-0100	
Hsc 100-100-35-03	
Hsc400201/02	
Dynamax 1200	
Hsb 1085-00	
Hsc40-01-875	
Typ 1862-10	

Hsm1300x700mm
Hsc400201/02-1000mm
Minilab Ii Analiz Cihazı
Dc50 110v Circulating Pump
557-2298
B1
Hsc-9502
808-0732 Coupling For Rotor
002-1293 Window
Fisons Vt 500
E 7
557-2286.
222-1688 Battery Charger Incl 4 Batteries Aa
Hsc 100-50-35-02 1600mm Sx
Ersatzteil
Hsc95.02
Hsc40-02-1150g
Hsc 40-20-02 1200mm Dx
Hsm1000x510
Dx-834620
Dc50/K35 Circulator System
557-2190
Hsc10002/2-1864-00
Mt 556-0025 - , No
Hsc40-02-1150d
1863-00-Hsc10002/1
550 362-0021
Safety Edge 120 Cm
002-1292 Coupling Motor/Gear
Hsm 2632-00

Hsc 95-35-02	
557-2193	
Hs100-02/02	
557-2299	
H-399-0200	
Hsc 40-20-02 1200mm Sx	
P1	
System-40-Cpu	RHEOCORD SYSTEM 40 1PH 20AMP 220VAC MODEL 80-40-00
Hsc 65.01 L=2645mm	
Cup Nv	
Hsc3-05-506267	
362-0021	
222-1679	
Hsc40-20-01/1030mm	
Rotor Nv	
399-0200 Viscotester	
Haake Viscotester 2plus	
799-0408 Housing Complete For Vt02	
557-2289	
F4391	
Ac200-A28	
4263602	TEMP CONTROL
Hsc3-05-506268	
808-0726 Mini-Motor For Vt02	
Hsc 100-50-35-02 1600mm Dx	
Hsc 40-20-02	
Dc10-K10	
Hsb Hsc 100 03-02	
C10-K10	
Hsc 100.03	
Hst-Sv1-4p-20a	

[Hsc5502](#)

[Hsc 65.03](#)

[10038561](#)

[10670863](#)

[399-0200](#)