


Noris Tachometerwerk GmbH Co

Garanti: 12 ay
Bu ¼r¼ne ait T¼rkiye i¼i kapı teslim fiyat ve teslim s¼resi i¼eren teklifimizi almak i¼in info@yursat.com.tr e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi i¼in +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz.
Noris Tachometerwerk GmbH Co Markası, tedarik s¼resi i¼in l¼tfen bizimle iletiŐime ge¼iniz.

Firmamız Noris Tachometerwerk GmbH Co T¼rkiye Distrib¼t¼r¼ veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen ¼r¼nlerde sadece Orjinal ve yeni ¼r¼n teklifi sunmaktadır. Bu sitede g¼sterilen ¼zel marka adları ve ticari markalar ilgili sahiplerinin m¼lkiyetindedir, talep durumunda kaldırılmaktadır.

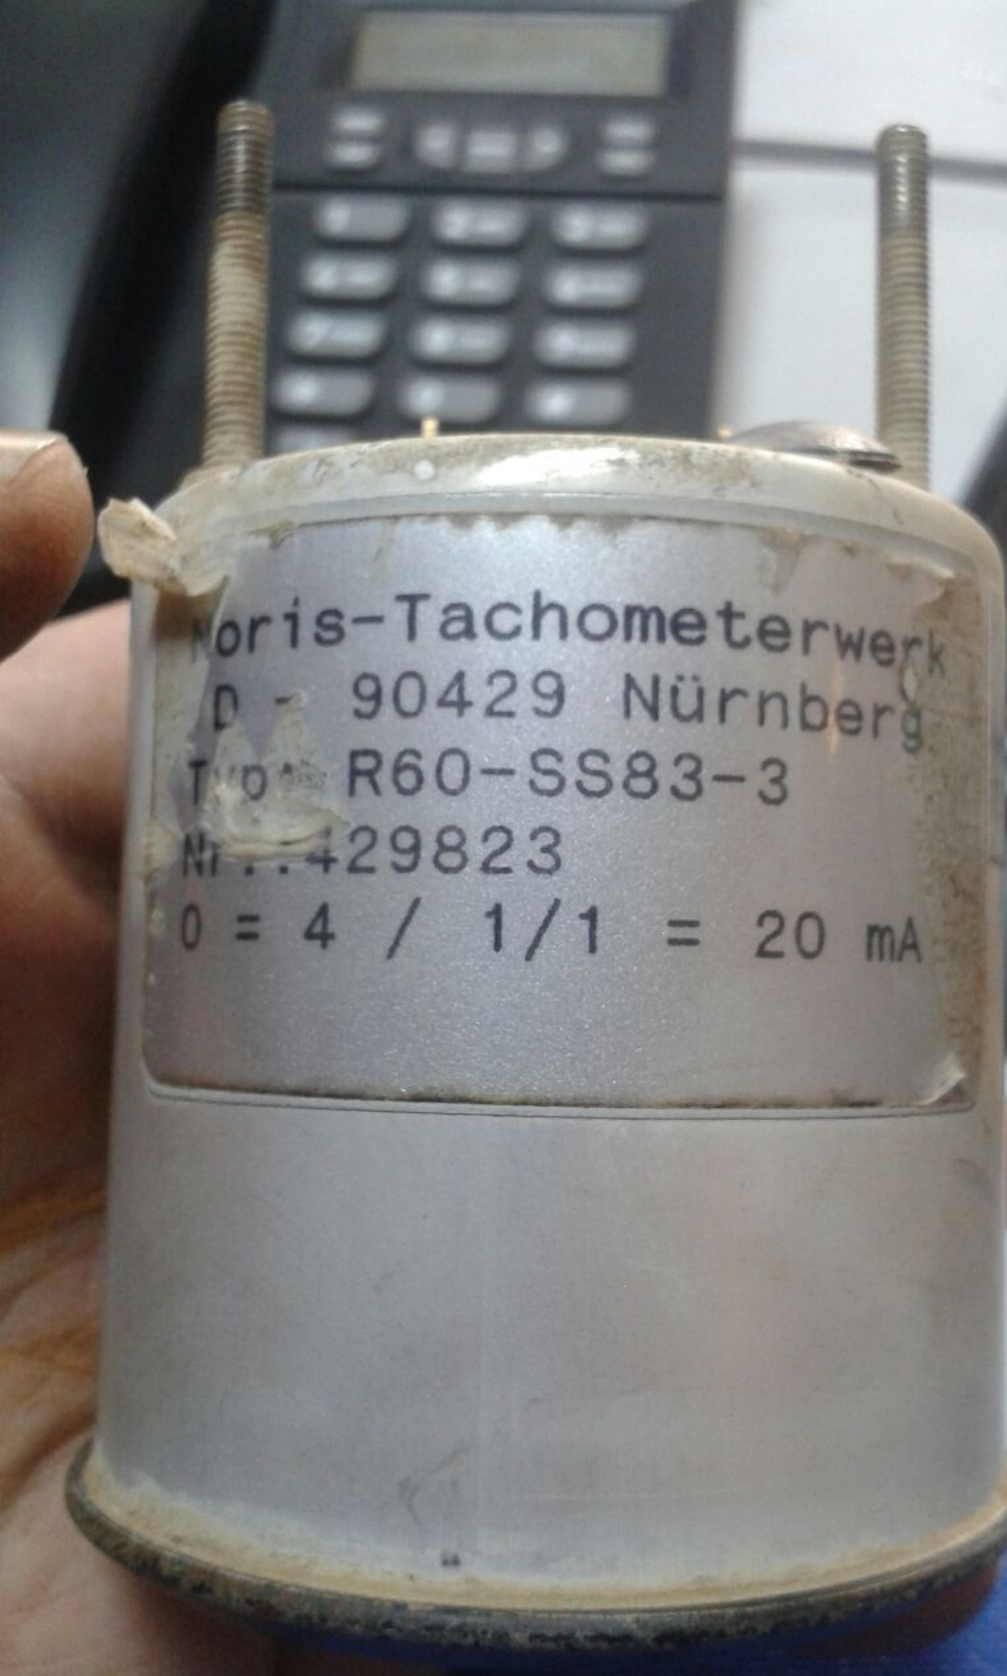

¼r¼n	Açıklama
SIR3-060-U1-982	Analog indicator Product version: A Drawing no .: 31.115.100 Data sheet: DB-SIR3_SIQ3 Display principle: moving-coil measuring mechanism Design and size: round; Ø 60 mm Dial and hands: white dial, black hands Scale: 0 ... 2500 1 / min, black Input signal: 0... 10 V DC Degree of protection: housing front IP66, IP67 and IP68 (1m, 24h); Case back IP30 Operating temperature: reference range: 5 ... 35 ° C, nominal range: -25 ... + 70 ° C Replacement for version R60, which is no longer available
RP51	Limit switch Product version: E Data sheet: DB-RP5 Design: modular housing TS32 / TS35 Overall width: 1 TE (17.5mm) Connection: flat plug 6.3 Measured variable: temperature Measuring principle: PT100 Measuring range: 0 ... 120 ° C Switching point: 0 ... 120 ° C Relay output: changeover contact in quiescent current Test function: No. Accuracy: 1.5% Supply voltage: 18 ... 32 V DC Operating temperature: -20 ... + 70 ° C
RU46-S	Limit switch for Ws after 64.211.1 Switching range 2 - 60 V AC Auxiliary power 24 V Gs working current principle 2 outputs : 1 x changeover switch, 1 NO contact
GE14-12	tachogenerator Drawing No.: 40.325 Data sheet: DB-GE14-x Design: clamping spigot Connection: flat plug 6.3 Measuring principle: tachometer generator Measuring range: 150...3000 rpm Output signal: AC voltage / DC voltage Shaft: tiltable with nose, connecting thread M22 x 1.5 phases 1 Degree of protection: IP 65 Operating temperature: -20...+80 ° C
4 -times engine MAN D2866E	
R60-Ss83-3	429823