


Omal

Garanti: 12 ay
Bu ¼r¼ne ait T¼rkiye i¼i kapı teslim fiyat ve teslim s¼resi i¼eren teklifimizi almak i¼in info@yursat.com.tr e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi i¼in +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz. **Omal** Markası, tedarik s¼resi i¼in l¼tfen bizimle iletiŐime ge¼iniz.

Firmamız Omal T¼rkiye Distrib¼t¼r¼ veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen ¼r¼nlerde sadece Orjinal ve yeni ¼r¼n teklifi sunmaktadır. Bu sitede g¼sterilen ¼zel marka adları ve ticari markalar ilgili sahiplerinin m¼lkiyetindedir, talep durumunda kaldırılmaktadır.

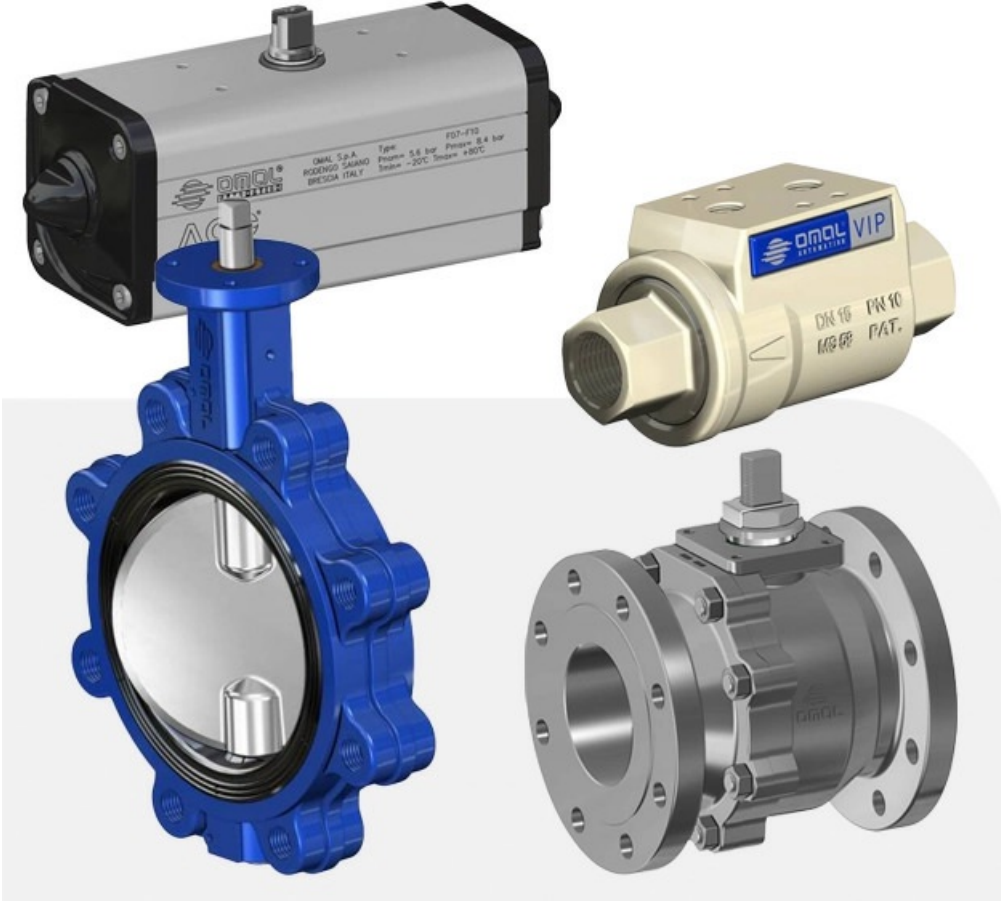

¼r¼n	A¼ıklama
Omal ½" S.R.Vip Vana-Nbr	
Fbr	3/4 DREI-WEGE-KUGELVENTIL
DA30	The ode should be chrome and 90 degree water resistant. It should come with actuator, 24 volt valve and positioner identical to label information. Visual is attached ---- Die Karosserie muss verchromt und wasserdicht sein. Es sollte mit einem Stellantrieb, einem 24-Volt-Ventil und einem Stellungsregler geliefert werden, die mit den Angaben auf dem Etikett identisch sind. Visual ist beigef¼gt
Pneumatic valve - VIP -	Single acting NC (normally closed) FKM DN 25 1 '
DN20 PN16 VIP VALVE REPAIR Kit " VITON	

AE 40	Complet
J9SPG14R4	
GMPI 10/30VOLT DC - 150mA	
DA30 F03-F05 DN20 PN100	
Omal DAN0180411S, DA180 F05-F07	
(V101N209)	2"
SRN0030402S, F05/F07	
GF050852	Reduction
J9SPG2106YX	
J9SPG1805YX	
J9APG2308YX	
J4SPG1604	
VALVE,BALL, ACTUATOR,DN32,PN16	
DA60 F03-F05 D376XE72	
DA60 F03-F05 D376XE72	
DN50(2")ACTUATOR+NAMUR VALVE+SW.BOX BALL VALVE	AISI304 Stainless Threaded Ball Valve, Double Acting Actuator, 24VDC Namur valve, Switch Box Included
J9APG1806	
J9AP2108	
J9APG2309	
DG376XE69-SMNF532024	Wafer type butterfly valve (WAFER); Smart Namur Solenoid valve 5/2 and 3/2 GGG/VA/EPDM, DN 50, DAN 030; housing made of GGG 50, stainless steel disc, Sleeve made of EPDM, BT -40°C to. 135°C. Complete with built-up pneumatic drive, double acting, Control pressure 5.6 bar. For the Installation between flanges according to DIN. PM 16. Smart Namur solenoid valve 5/2- and 3/2-way, G1/4"; monostable, spring return, 1 coil 24VAC 5VA; 2 Sintered silencer
Typ A-10	Technische Daten nach Datenblatt: PE 81.60 Messstoffberührte Bauteile: 316L Gehäuse: 316L Nichtlinearität: 0,5% BFSL Einheit: bar Druckart: relativ Messbereich: 0...0,4 bar Prozessanschluss: G 1/4 A DIN EN ISO 1179-2 Dichtung: NBR zulässige Messstofftemperatur: 0...+80 °C Ausgangssignal: 4 ... 20 mA, 2-Leiter Hilfsenergie: 8...30 V DC Elektrischer Anschluss: Winkelstecker DIN EN 175301-803 A Zulassungen: cULus
DN32PN10MS58PAT	

V101N203	2 pcs. Ball valve, MS/PTFE, 3/8" female thread, F03, 9mm 2-piece ball valve, housing made of Brass, chrome plated. ball out Brass, hard chrome plated. poetry made of PTFE, connection on the right side. Threaded sleeve according to DIN 2999, Mounting flange according to DIN/ISO 5211 for the direct construction of drives. 3/8" and 1/2" = PN 63, 3/4" and 1" = PN 50, 1.1/4" and 1.1/2" = PN 40, 2" = PN 32, 2.1/2" and 3" = PN 25. Operating temperature from -20°C to +150°C. With free shaft end
SRN0053401S	Rotary drive SRN 53, F05-F07, 8-point. 17mm Pneumatic rotary drive, Angle of rotation 90°, single-acting, spring force closes, Control pressure max. 8.4 bar, Nominal control pressure 5.6 bar, torque corresponds drive size, Mounting flange according to DIN/ISO 5211
RHE1714	Reducing sleeve 17/14 Reducing sleeve made of stainless steel ISO 5211 - DIN 3337.
R2518PKS0B-00A	
DAN0030411S	
VNC10006 ,G1	Axial pneumatic valve
VNC10005 ,G3/4	Axial pneumatic valve
DN15(1/2")ACTUATOR+NAMUR VALVE+SW.BOX BALL VALVE	
DN20(3/4")ACTUATOR+NAMUR VALVE+SW.BOX BALL VALVE	
DN25(1")ACTUATOR+NAMUR VALVE+SW.BOX BALL VALVE	
DN32(1 1/4")ACTUATOR+NAMUR VALVE+SW.BOX BALL VALVE	
DN40(1 1/2")ACTUATOR+NAMUR VALVE+SW.BOX BALL VALVE	
DN50(2")ACTUATOR+NAMUR VALVE+SW.BOX BALL VALVE	
DN32 WAFER TYPE BUTTERFLY VALVE WITH ACTUATOR	SW.BOX+NAMUR VALVE
DN40 WAFER TYPE BUTTERFLY VALVE WITH ACTUATOR	SW.BOX+NAMUR VALVE
DN50 WAFER TYPE BUTTERFLY VALVE WITH ACTUATOR	SW.BOX+NAMUR VALVE
DN65 WAFER TYPE BUTTERFLY VALVE WITH ACTUATOR	SW.BOX+NAMUR VALVE
DN80 WAFER TYPE BUTTERFLY VALVE WITH ACTUATOR	SW.BOX+NAMUR VALVE

DN100 WAFER TYPE BUTTERFLY VALVE WITH ACTUATOR	SW.BOX+NAMUR VALVE
DN125 WAFER TYPE BUTTERFLY VALVE WITH ACTUATOR	SW.BOX+NAMUR VALVE
DN150 WAFER TYPE BUTTERFLY VALVE WITH ACTUATOR	SW.BOX+NAMUR VALVE
RS3L(5m)(PNP9	5-30 V DC
ITEM490 2"	Connections : threaded iso 228/1 Material - 304 s.s
C0952E1200-A00A	
C414a5e65	
S415a071	
S420x008	
Da180	
S400x004	
M41516p72	
L412fx613	
L412fx615	
Sr30	
S410h070	
C415a5i70	
V414x608	
415a5g67	
S376kn72	
C415a5e64	
Ae10 135	
D153h005	
D412fa071	
L412x610	
V414x605	
M41516f65	
M41516f67	
V414x607	

S415h068
L545x611
S410h073
Da60
V515-Dn50
S410a067
Da30-F03-F05
S412h070
V386xe70
41516n72 Stainless Steel Ball Valve
Da 15 Std
415a5g68 Stainless Steel Ball Valve
M41516c64
Aggiusta Articolo Der - Seal For Da30x00
(Kom 10383/3) J4spg1404 Schr¼gsitzventil Mit Kolbenantrieb
Sr360
S410fh074
V386xe69
S400x007
D410fa072
S415h070
V400-Dn25
J4spg1404
S410fa072
V412fx615
415a5g68
V382xe74 (Ex.V382xn74)
S410fa069
V415x607

Sr480
Omal Er8188c2 (Er818000)
415a5g67 Stainless Steel Ball Valve
D412fh073
V414x609
Sr960
S376xe68
517.201
S415a067
L412x612
Ae020020 Ae On-Off Type 24v Dc
S410h068
S414h072
J4apg1846
V101n208-Dn40/Pn40
2000-A-2-20.0-Ee-Rg-Gm85-B-D Mc13 Valve
Da120
M41516170
V414x606
Ae120004 Ae On-Off Type 24v 50/60 Hz
V515-Dn65
C415a5e65
S415a069
V412fx611
Sr180
C414a5e64
Ae021004 Ae On-Off Type 24v Dc
V515
Sr120
V412x610

S515a071
Da030411s
Ae020007 Ae On-Off Type 24v Dc
Vha4aabab03
V101dn25pn50f03
Kgd10018
M41516f66
3090.02 / Sr030401s Antrieb Sr30 Ohne Kugelventil
350.911
V414x604
D412a072
S410h064
V386xe73
M41516l68
56653 (280254-24vdc-17w)
D412fh075
M41516l69
Ab2mrlmi2mr3 Valve Socket
L412fx611
Sr90
D412fa069
V412x612
Vcn21003
Sr60-F05s07
D410h073
Ae020004 Ae On-Off Type 24v Dc
S400x006
S410h065
Vna21003
C415a5e66

Dd240
C415a5i69
L412fx614
D412h070
S376xe71
41516n72
V412fx613
Kgd10014
Ae120001 Ae On-Off Type 24v 50/60 Hz
S376xe74
S450h004
D412fh074
D410fh074
S410fa071
V412fx609
Dg101h009
S412fa069
C415a5k71
L412fx609
A1-T-09-01-3-B-R
D100h008
D376xe71
V412fx614
Da045412s
Ekc 0519
180sr+rce4ln2-Ns5002
3090.00
D400-H066
S415a072
M41516l71

[S410h066](#)