


Pietro Fiorentini

Garanti: 12 ay
Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin info@yursat.com.tr e-posta adresine bařvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulařabilirsiniz.
Pietro Fiorentini Markası, tedarik sresi iin ltfen bizimle iletiřime geiniz.

Firmamız Pietro Fiorentini Trkiye Distribtr veya temsilcisi deęildir. Firmamız sipariř durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.

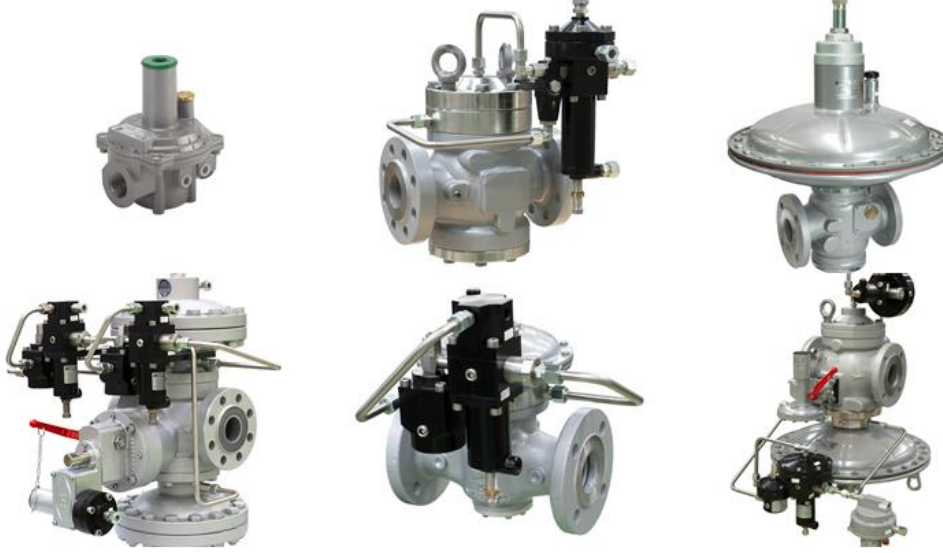

rn	Aıklama
DIVAL600/G 280MP PN16/25	DN 40 PF7066115G Gas pressure regulator, PN 16/25, spring loaded, CE approved according to DGR 2014/68 / EU and EN334, actuator housing GGG40, actuator 280mm, Ps 20 bar according to EN12186, Pe max 20 bar, Pd 80-350 mbar, design temperature -20 ° C / + 60 ° C, operating temperature EN334 -10 (-20) ° C / + 60 ° C, Painting of actuator housing color: RAL9006, Pulse connection 12L, breathing connection G½ ", Customs tariff number 84811019, origin Italy, length 223mm 1.1 SAV switching device LA / MP 250 (CE) DVGW Art No. 7086171P integrated with manual release and bypass, guide areas Who 140 - 450 mbar, Whu 10 - 240 mbar, pulse connection 12L, breathing connection 10L
DIVAL500MP - 1"1/2	DN 25x40 article nr. X0150050 Gas pressure regulator, spring loaded, fail to open, CE approved according to DGR 2014/68 / EU and EN334, actuator housing ENGJS400- 15, connection G1 "x G1" 1/2, with integrated SBV, Ps 20 bar according to EN12186, Pe max 20 bar, Pa max 300 mbar, Design temperature -20 ° C / + 60 ° C, operating temperature EN334 - 10 (-20) ° C / + 60 ° C, with internal impulse line, optionally external Pulse and blow-off or. Breathing connection G¼ "or 10L Overall length 130 mm Pds: 300 mbar according to S / N 201506477370 + 1.1 SAV switching device LA / MP 512 (CE) DVGW article nr. FM7086505P integrated safety shut-off valve (SAV), with bypass and internal impulse drilling, guide areas Wdso 140-450 mbar, Wdsu 10-240 mbar, breathing connection G1 / 8 "or 10L, optional impulse connection G1 / 4 "(closed with Blind plug), weight 0.9kg
MODEL DIVAL 500	1"1/2 MP PS:20 BAR Bpu:1.5-20 BAR Pd:300 MBAR SN:201506477370

10605
2006E01862
201202835578
201504957941
204/A + R14/A x Reval
204/A/FO
2620034
2620038
2620054
2620060
2620062
2620072
2620336
2620339
2620346
2620352
2620374
2620400
2620407
2620424
2620436
2622174
2622331
2623025
2624574
2700525
2700830
2700920
2701040
2840232
2840242
30052DC
30150DC
30152
30153DC
30157DC

[30158/F](#)

[375TR](#)

[3806410](#)

[46574017VGM P](#)

[4900293](#)

[4900362](#)

[4900364](#)

[4900368](#)

[4900374](#)

[4900381](#)

[4900662](#)

[4900879](#)

[4900955](#)

[4900999](#)

[4901504](#)

[4901524](#)

[4901624](#)

[4902178](#)

[4902404](#)

[4902561](#)

[4903291](#)

[4903428](#)

[4903451](#)

[4903913](#)

[4904005](#)

[4904213](#)

[50101/F](#)

[50202](#)

[50202/F](#)

[60030460](#)

[60030760](#)

[6015271](#)

[6015272](#)

[6015273](#)

[6015904](#)

6015908
630
644.70165
64470038
64470038GI
64470122
64470123
64470363
64470364
64470368
6506230500
6516230400
7009200
7009300
7009342
7009390
7009400
7009492
7012128
7012133+7086063
7012599
7012978 + 7012988
7013178
7013714
7013734
7013820
7013851
7013853
7013853 + 7050908
7013910
7013941
7013941 + 7050908CS10
7066005G / DIVAL600/G 280TR PN16/25 / NW: DN25
7066008G
7083032CS10
7083066

7086172P / LA/TR 250 (CE) DVGW
7121001
7121252
7121336
7200187
7409066
7409127
7435114
755200201
7600006
7600031
7620002
7656027
7656031
7656184
7656194
7656197
7656207
7656673
7656818
7656868
7656871
7686362
7770036
7770041
8023352
8337020
AL021
ANSI150 DN50
AREFLUX 819 ANSI600 DN 150 7009642
AUSGLEICHSMEMBRAN NORVAL/DIVAL250 7656018
BF 31
DIVAL 507/512 MP.
DIVAL160 AP ANSI 300 (incl. SAV-Schaltgerat SB87/103)

DIVAL160 AP ANSI 600 DN 25 7012133
DIVAL500TR
DIVAL500TR - 1
DIVAL507/G 180BP-10
DIVAL507/G 180TR
DIVAL600/A 280TR ANSI 150 DN 25
DIVAL600/G
DIVAL600/G 280BP PN16/25
DIVAL600/G 280MP PN16/25 DN 40
DIVAL600/G 280TR ANSI 150 (7066024)
Dival 500
Dival 500 DN25x40 Bp p2=70mbar
Dival 507 mp
Dival 600
Dival 600 MP
Dival SQD
EVRMNA1
EZR-05X
F0996614000A
F30152
FE 10
FE X
FE XS BP
FE10 LT L
FE10 LT S
FE10 ZC
FE25 LT L
FE25 LT S
FE25S
FES
FES LT L
FES LT S
FM0991001200A
FM0991001800 A
FM0991002000A
FM0996222200D

FM0996223400D
FM0996223700E
FM0996224400A
FM0996311400 B
FM0996332000 B+FM0996224400 A
FM0996332000B
FM0996336000 B+FM0996224800 A
FM0996336000B
FM0996610000A
FM0996614000A
FMVAABC0AS DNA
G62297
HBC 975
HFB/1
HFB/2
KIT1114
LA/MP 250 (CE) DVGW
LA/MP 512(CE)
Megadrone
MEMBRAN 305/A 7656097
MEMBRAN APERFLUX 851 DN150 7656226
MQ364
MQ448
Mod. FEX
Mod. GR6
NanoPico
Norval 65
NORVAL/G 375 PN16 DN 40 (7012294)
NORVAL/G 495 PN16 DN 65 (Best.- Nr. 7012594)
NORVAL/G 630 PN16 DN80
NORVOL GT4GI
Pdo: 0,250 bar
PF VLM
PF4700009
PF4700014

PF4700180
PF4700181
PF4700230
PF4700247
PF4700258
PF4700261
PF4700287
PF4700400
PF4700432
PF4700442
PF4700446
PF4700448
PF4700452
PF4700480
PF4700521
PF4700522
PF4700523
PF4700524
PF4700525
PF4700530
PF4700532
PF4700613
PF4904214
PF4904307
PF4904421
PF4904421+FM0996224000 C
PF4904422
PF4904422+FM0996223400 D
PF4904429
PF4905071
PF7066116G+7086171P
PFP14006897V 501
PFP201500321
R14/A PF4900879
R14/A/FO PF47700011
RS 2001

RSE/2001 (G4)	
SAV-Schaltgerat LA/MP 250 (CE)	
SAV-Schaltgerat LA/TR 250 (CE)	
SBC 782	
ST.446 TN040 NBR (7121396)	
SZ016	
TB437	
TRUNNION 130-6/FB ANSI600 DN 100	
Trunnion	
TS 10624	
VS/AM58	
X011020	
X0150050	
X0150230	
X0150260	
X0151210	
KIT 204/A- 204/A/FO REFLUX	PF4700608
KIT APERFLUX 851 / PM819	4901225
KIT 304/A LT-CE-AL FROM 2012	PF4904498
KIT AR100	4903451 complete
KIT R14/A (FULL VITON)	4900879V
DIVAL600/G 280TR PN16/25	DN 50 7066008G Gas pressure regulator, PN 16/25, spring-loaded, CE tested according to DGR 2014/68/EU and EN334, actuator housing GS400- 18ISO1083, actuator 280mm, Ps 20 bar according to EN12186, Pe max 20 bar, Pd: 0.28 - 4.2 bar, design temperature -20°C / +60°C, Operating temperature EN334 -10(-20)°C / +60°C, painting Actuator housing colour: RAL9006, impulse connection 12L, Breathing connection G½", customs tariff number: 84811019, origin Italy, overall length 254mm Spring: 0.840-1.250 bar
Aperflux 851 + PM819	DN 2" Class 600
319BCV581	REFLUX 819 ANSI300 1.1 REFLUX 819 ANSI300 Gas pressure regulator with auxiliary energy, medium-controlled, fail to close, flanges PN40, CE tested according to PED 2014/68/EU and EN334, actuator pipe valve, easy to maintain, actuator housing cast steel A352 LCB, Ps 46.9 bar, Pa max 43 bar, Design temperature -20°C / +60°C, operating temperature EN334 - 10(-20)°C / +60°C), paint colour: RAL9006, Flange cover galvanized, internal piping 10L, Impulse and breathing connections 12L KG 2335, overall length 267mm, weight including pilot system 64kg + 1.1 204/A + R14/A x Reflux (Germany) PFP201500316 Pilot control system for REFLUX819, Pzul up to 100 bar, Connection cutting ring fitting 12L or G¼", with auto. Auxiliary pressure stage R14/A and internal fine filter, Outlet pressure range Wh 0.3 - 43bar Pds: 3.5 bar Spring: 1.5-7.0 bar + 1.2 Silencer DB 819 ANSI600 DN50 7009240 Weight 66kg
	REFLUX 819 ANSI600 (Germany) DN 50 PFP201500321 Gas pressure

319PCV584	regulator with auxiliary power, ANSI 600 RF, Controlled by its own medium, fail to close, CE tested according to DGR 2014/68/EU and EN334, actuator body ASTM A352 LCC, Ps 100 bar, Pd max 74 bar, design temperature -10°C/+60°C, Operating temperature EN334 -10(-20)°C /+60°C, painting Colour: RAL9006, internal piping 10L, impulse and Breathing connections 12L KG 2335, length 286mm, weight including pilot system 64kg + 2.1 204/A + R14/A x Reflux (Germany) PFP201500316 Pilot control system for REFLUX819, Pzul up to 100 bar, Connection cutting ring fitting 12L or G¼", with auto. Auxiliary pressure stage R14/A and internal fine filter, Outlet pressure range Wh 0.3 - 43bar Pds: 21 bar spring 15.0-33.0 bar + 2.2 Silencer DB 819 ANSI600 DN50 7009240 Weight 66kg
319PCV583	REFLUX 819 ANSI600 (Germany) DN 50 PFP201500321 Gas pressure regulator with auxiliary power, ANSI 600 RF, Controlled by its own medium, fail to close, CE tested according to DGR 2014/68/EU and EN334, actuator body ASTM A352 LCC, Ps 100 bar, Pd max 74 bar, design temperature -10°C/+60°C, Operating temperature EN334 -10(-20)°C /+60°C, painting Colour: RAL9006, internal piping 10L, impulse and Breathing connections 12L KG 2335, length 286mm, weight including pilot system 64kg + 3.1 204/A + R14/A x Reflux (Germany) PFP201500316 Pilot control system for REFLUX819, Pzul up to 100 bar, Connection cutting ring fitting 12L or G¼", with auto. Auxiliary pressure stage R14/A and internal fine filter, Outlet pressure range Wh 0.3 - 43bar pds: 33 bar spring 22.0-43.0 bar + 3.2 Silencer DB 819 ANSI600 DN50 7009240 Weight 66kg
Filter Serie 106/ DN 100/ 10609/F	Gas filter Pmax 10 bar, according to DIN3386 and DIN/EN161/91, CE according to DGR 2014/68/EU, for all gases according to G260/1, filtering 50 µm, connection option for differential pressure gauge G¼". Working temperature range -15°C to +80°C, housing Aluminum, connection flange DN100 PN16, weight 10.75 kg
HFA/5	Filter cartridge
REFLUX 819	REGULATOR DIAPHRAGM (RMN 350 DN50 KIT)
FILTER	REFLUX 819 FILTER 755201 PRODUCT CODE FILTER AISI 316 KAV 206 (22MMx22MMx8.6MM)
FILTER	REFLUX 819 FILTER 755200 PRODUCT CODE FILTER AISI 316 KAV 211 (13MMx16MMx4.2MM)
GASKET	REFLUX 819 FILTER PRODUCT CODE8GL062600K1 RMG BD FIG 270 MK2 DN 50 KIT
OBT-NORVAL DN1 ½	REFLUX 819 REGULATOR OBTURATOR 200 SERIES ST 411 PRODUCT CODE 7200003- WITHOUT HOLE
GASKET	REFLUX 819 REGULATOR GASKET RMG 630/640 PRODUCT CODE 7656027
DIAPHRAGM	REFLUX 819 DIAPHRAGM PRODUCT CODE 7656211 DIAPHRAGM OF R14 PART
TEFLON WASHER (FOR REGULATOR)	TEFLON WASHER FOR REFLUX 819 6 MM HOLE DIAMETER 155 MM OUTER DIAMETER AND 2 MM THICKNESS
Goval F30165	Single-stage gas pressure regulator, direct-acting with Safety diaphragm, PS 2 bar, max. inlet pressure 1 bar, Outlet pressure range: 5-300 mbar, length 236mm, housing Aluminum, internal thread connection, commodity number: 84811019, origin Italy, weight: 5.6 kg with built-in standard spring 10-30 mbar. Other Setting ranges can be supplied with a separate spring (surcharge) Code FMF301650007AB with spring 60-150 mbar
Goval F30161	Single-stage gas pressure regulator, direct-acting with Safety diaphragm, PS 2 bar, max. inlet pressure 1 bar, Outlet pressure range: 5-300 mbar, length 134mm, housing Aluminum, internal thread connection, commodity number: 84811019, origin Italy, weight: 1.2 kg with built-in standard spring 10-30 mbar. Other Setting ranges can be

	supplied with a separate spring (surcharge)
membrane Norval 375TR	
Stabilizing membrane Norval DN8	
Valve seat seal SH85 green	
Norval spring d15xD 85xL260 27049	
PF4700292	Maintenance kit Reval DN 100
PF4700247	Maintenance kit Pilot 201/A (from 2005)
PF4700243	Maintenance kit R31/A from 2005
PF4700236	Maintenance set SA from 2007 DN 100 Aperval and Reval
PF4700230	Maintenance set VB31/32 + SA91/92 + SN91/92
Maintenance kit Norval 375+IN-TR	DN 80 4901632
FLOWMETRE	G160 QUANTOMETRE Qmin:16 m3/H, Qmax:250 m3/H
VS/AM 65 TR	FM7081003X Safety relief valve, PS 20 bar according to EN12186, CE tested according to DGR 2014/68/EU and DIN33821, connection G 1", housing GD-AI, setting range 0.5-7.0 bar, AG 2.5, Ambient temperature -20°C / +60°C, with internal breathing, Statistical goods number: 84814010, origin Italy, (item no. for maintenance kit FM0996614000A), weight 0.7 kg, Pds: 4.4 bar (spring range 2.3 - 5.0 bar) as stated Factory no. -Customer request -Pds:3.0 bar spring: (spring range 2.3 - 5.0 bar))
NORVAL/G 375TR PN16	Gas pressure regulator, spring-loaded, PN 16, CE tested according to PED 2014/68/EU and EN334, actuator body GS400-18ISO1083, Actuator 375TR, design temperature -20°C / +60°C, Operating temperature EN334 -10(-20)°C / +60°C, painting, Commodity number: 84811019, country of origin: Italy, Actuator body color: RAL9006, pulse and Breathing connections G½", - Ps 16 bar according to EN12186, Pe max 16 bar, Pa 0.9 - 4.4 bar, length 254 mm, weight 50 kg equivalent to S/N 2005G00629 Wds: 1,450 - 2,400 bar -Customer request: 4.4 bar Spring range: 3.0-4.4 bar
SAV switching device SN92 and actuator DN50	integrated with manual release, guidance ranges Who 0.65 - 5.5 bar, Whu 0.2 - 3.1 bar, connection G 1/4" or 12L, operating side at the front with flow direction left - right includes PFP201500003 + 7075241 (switching device) according to S/N 2006L00965 Attention new spring areas: Wdo: 1,000 - 2,000 bar Wdu: 0.550 - 1.600 bar
NORVAL/A 375TR PN16	Gas pressure regulator, spring-loaded, PN 16, CE tested according to PED 2014/68/EU and EN334, actuator body ASTM A216/A, Actuator 375TR, design temperature -20°C / +60°C, Operating Temperature EN334 -10(-20)°C / +60°C, Statistical Goods number: 84811019, country of origin: Italy, Paintwork of actuator housing color: RAL9006, impulse and Breathing connections G½", customs tariff number: 84811019, origin Italy, - Ps 16 bar according to EN12186, Pe max 8 bar, Pa 0.9 - 4.4 bar, Overall length 352 mm, weight 121 kg equivalent to S/N 2005G00766 Wds: 2,100 - 3,150 bar
SAV switching device SN92 and actuator DN100	integrated with manual release, guidance ranges Who 0.65 - 5.5 bar, Whu 0.2 - 3.1 bar, connection G 1/4" or 12L, operating side at the front with flow direction left - right includes PFP201500005 + 7075721 (switching device) equivalent to S/N 2006L01206 Attention new spring ranges: Wdo: 1,920 - 3,250 bar Wdu: 0.550 - 1.600 bar
PF4700300	Maintenance kit Reval 182 DN 250
7805505	Valve rod reflux + Reval DN 250
2702975	Spring d 7 x D 85 x L300 x it10½

7710280	Compensating piston Reflux Reval DN 250
PF4700609+PF4700009	Maintenance kit 204/A x Reval/Dixi 2005 + Maintenance kit R14/A from 2005 completely
PF4700609	Maintenance kit 204/A x Reval/Dixi 2005
PF4700009	Maintenance kit R14/A from 2005 completely
PF4700182	Maintenance kit 103M
PF4700157	Maintenance kit SB/82 Reval DN 250
4904006	Maintenance kit Dival 600TR DN 25
FM0996222700C	Maintenance kit LA/TR 160
PF4700375	Maintenance kit PVS 803 PN16-40 DN 50
PF7087230 + 7050169	PVS 803 PN16 Safety relief valve, with auxiliary energy, own medium controlled, fail to close, PN 16, actuator housing GS, actuator stainless steel, actuator seal Viton, Pe max 16 bar, Ambient temperature -20°C / +60°C, design temperature -10°C / +60°C (other temperatures on request), Paint actuator housing color: RAL9006, flange cover galvanized, internal piping E/O 10L, impulse and Breathing connections G¼" or 10L, length 254 mm, weight including pilot controller 32kg + Pilot controller P16/M Pzul up to 100 bar, connections EO 10L or G¼", with integrated Fine filter, guide range 1.5 - 40 bar, galvanic housing galvanized and painted,
PF4700375+PF4700005	Maintenance kit PVS 803 PN16-40 DN 50 + Maintenance kit P16/M
7656286	MODEL APERVAL 4" POS.20 MEMBRANE
DIVAL512/G 180BP-1	DN 25x40 FM7064002G Gas pressure regulator, PN10, spring loaded, fail to open, CE tested according to DGR 2014/68/EU and EN334, actuator housing EN GJS 400-18 [EN 1563], connection G1" x G1½", with integrated SBV Connection G¼" or 12L (can be deactivated at an additional cost), with internal impulse line, Ps 10 bar without int. SAV, Pumax 10 bar, Wd: 20-110 mbar, design temperature -20°C / +60°C, operating temperature EN334 -10(-20)°C / +60°C, Overall length 130 mm
PVS 803 PN16	DN 50 PF7087230 Safety relief valve, with auxiliary energy, own medium controlled, fail to close, PN 16, actuator housing GS, actuator stainless steel, actuator seal Viton, Pe max 16 bar, Ambient temperature -20°C / +60°C, design temperature -10°C / +60°C (other temperatures on request), Paint actuator housing color: RAL9006, flange cover galvanized, internal piping E/O 10L, impulse and Breathing connections G¼" or 10L, length 254 mm, weight including pilot controller 32kg Pilot controller P16/M 7050169 Pzul up to 100 bar, connections EO 10L or G¼", with integrated Fine filter, guide range 1.5 - 40 bar, galvanic housing galvanized and painted, set to 16 bar
PVS 803 PN16 DN 50 PF7087230	Safety relief valve, with auxiliary energy, own medium controlled, fail to close, PN 16, actuator housing GS, actuator stainless steel, actuator seal Viton, Pe max 16 bar, Ambient temperature -20°C / +60°C, design temperature -10°C / +60°C (other temperatures on request), Paint actuator housing color: RAL9006, flange cover galvanized, internal piping E/O 10L, impulse and Breathing connections G¼" or 10L, length 254 mm, weight including pilot controller 32kg Pilot controller P16/M 7050169 Pzul up to 100 bar, connections EO 10L or G¼", with integrated Fine filter, guide range 1.5 - 40 bar, galvanic housing Galvanized and painted, set to 6 bar
	DN 50 7076241 Safety shut-off valve PN40, CE tested according to DGR 2014/68/EU and EN334, actuator housing cast steel ASTM A216, Ps 40 bar, Design temperature -10°C / +60°C Temperature range PED -10°C / +60°C, paint finish housing: RAL9006, impulse and breathing connections 12L KG 1970, Length 254mm, weight 35kg Actuator SAV

SBC 782 PN40 Basis	SB82 BP (CE) 7076212 Valve disc element with integrated bypass Weight including switching device 9kg SAV switching device 103M (Germany) DN1"-4" PFP201400659 with manual release and diaphragm rupture protection, with upper and lower cut-off, guidance ranges Who 1.8 - 23 bar, Whu 0.15 - 8.0 bar, connection G1/4" or cutting ring screw connection 12L
1221504	
PRESSURE REGULATOR DN50 PN16 REPAIR KIT	S.N:2005G00629,PS:16 BAR,PEMAX:16 BAR,AC:10,SG:10,CG:1360,FLUID:N.G.,WR:0.90/4.40 BAR,WA:1.45/2.40 BAR,STEIN HEURTEY NO:50. DR.GN.01
PRESSURE REGULATOR DN100 PN16 REPAIR KIT.	S.N:2006G00766,PS:16 BAR,PEMAX:8 BAR,AC:5,SG:10,CG:5100,FLANGE:S 150 RF,WH:0.9/4.40 BAR,PE:2.35/8 BAR,STEIN HEURTEYNO:100.DR.GN.01, DN:4", WA:2,1/3,15
IPR-B 150	Serial Number: 2173504 Fluid: Natural gas Pa: 1000 mbar Pso: 1300 mbar bpe: 2 / 18 bar Psu: 400 mbar Ts: -10 °C / +60 °C Notified Body Number: CE 1370 Material properties, The capacity of the natural gas regulator is 200 nm ³ /h. -It reduces the pressure from 7 bar to 1.8 bar. - Regulator width is 130 mm.
SAV switchgear 103MH CE/DVGW	70312204 Control ranges Who 1.8 - 23 bar, Whu 8.0 - 19 bar, Spare part assembly for attachment to SB82 DN25-DN100 with spring for upper shut-off range: 6.5-15.5 bar with spring for lower shut-off range: 8.0-19 bar
VS/AM 58	7083050 Safety relief valve PS 100 bar, CE tested according to DGR 2014/68/EU and EN ISO 4126, internal thread connection G1", housing 11SMnPb37-EN10087/98, guide range: 2 - 44 bar, AG10, valve seat diameter 23mm, ambient temperature - 20°C / +60°C, weight 2.5 kg
BLD 211	PFP202400088 with MQSOEX-3M for VS/AM 58
DIVAL600/G 280BP PN16/25	DN 40 7066003G Gas pressure regulator, PN 16/25, spring-loaded, fail to open, CE tested according to DGR 2014/68/EU and EN334, actuator housing GS400-18ISO1083, actuator 280mm, Ps 20 bar according to EN12186, Pe max 20 bar, design temperature -20°C / +60°C, Actuator housing paint color: RAL9006, Pulse connection 12L, vent connection G½", customs tariff number 84811019, origin Italy, length 222mm, Output pressure range: 15 - 90 mbar, with built-in spring 40- 80 mbar
SAV switching device LA/BP 250 (CE) 7086170P	with manual release, pressure ranges Who 30 - 180 mbar, Whu 10 - 60 mbar, connection G¼" or cutting ring screw connection 10L (12L) INCORP. SAFETY SHUT OFF VALVE
DIVAL 500 TR – DN G1" x G1 ½"	Pd with spring 1000-1200 mbar Without internal relief valve + Shut off Device LA/TR 512 OPSO: 1,2 bar, without UPSO (blocked)
G100 DN80 PN16	Rotary meter
7656219	Working diaphragm Aperflux Std. DN 50
NORVAL/G 375 PN16	
SAV switching device SN91 and actuator	DN50 integrated with manual release, control ranges Who 25 - 1100 mbar, Whu 10 - 900 mbar, connection G 1/4" or 12L, operating side at the front with flow direction left-right includes PFP201500002 + 7075241 (switching device) Pdso with spring 0.5 - 0.9 bar
2620346 O-Ring	
- Regler Mit Integriertem Monitor Reflux 819 (Mit Den Piloten 204) Dn80 Ansi600 Rf	
Norval/G 630 Pn16 Optional	
2620062 O-Ring	

Pf4700230 Wartungssatz Vb31/32 + Sa91/92 +sn91/92
7656895
7600006 Dichtung
7086063
Pietro Regã220;Latã214;R Attached Image
9001305
10601
Fe S
Sz016 Brush
Pf4904421 Ersatzteilsatz Dival 600 Trab Fabrik- Nr.: 201101647008dn 40
Dival 600tr
7686423
8337020 Raumteiler
Vs/Am65tr 0996614000a
4902404 Reparatursatz Regler Reval 182 Sb/101
60031300
4904213 Satz Ersatzteile
For 201404051044 201404051045
2620430
7066007g
2840242 Cartridge (Into The Gas Cog Filter Separator)
7013318 (+7050969cs10+7086172p)
2000g03414
2620424 O-Ring
Model: Vs/Am65mp Ps:20bar Wh:150-500mbar Wa:300-500mbar Relief:480mbar Set At 6
Manometer Im Ausgang
7066005g / Dival600/G 280tr Pn16/25 / Nw: Dn25
Fex
Pf4700181 Wartungssatz 102m
Vs/Am 65 Mp Sicherheitsventil Federbelastung 0,04 Mpa
Fmf10607f1ba Filter Element For Filter
7013178 Dixi/Ap Dn1" Ansi600rf/Sb (4-14 Bar)

4903913 Satz Ersatzteile
10605 Gasfilter Pmax 10 Bar
2006e01862 Model : La/Tr-250 Obsolete. Replaced By Dival600/G Gas Regulator Pietro
10604
X011030
7656207 Arbeitsmembrane Pos.: 321
4901189
7012710
2620436 O-Ring
Fes Tr
O-Ring 2620407
Dival/160g/275bp Sn 2006e02914
2623050
204/A/Fo + R14/A/Fo
2840242 Cartridge
64470038 Feder Gelbe Zum Regler Mt-185 -R
Fe S Tr L Zg K
Mo448 Suction Motor
Ersatzteilsatz R14/A Sr183 4900879
Fm0996610000a Wartungssatz Vs/Am65bp
Dival600/A 280tr Ansi 150 Dn 25
- Druckregler Fuer Gas Pietro Fiorentinni Fexs
Norval/G 630 Pn16 Dn 80 (7012709)
4901524 Wartungssatz Dixi Dn 50
2620034 O-Ring
9001220
2620054 O-Ring
Pf4700009 Wartungssatz R14/A Ab 2005
DIVAL600/G 280TR PN16/25 DN 50 7066008G Gas pressure regulator, PN 16/25, spring-loaded, CE tested according to DGR 2014/68/EU and EN334, actuator housing GGG40, actuator 280mm, Ps 20 bar according to EN12186, Pe max 20 bar, Pd: 0.28 - 4.2 bar, design temperature -20°C / +60°C, operating temperature EN334 -10(-20)°C / +60°C, Paint of actuator housing color: RAL9006, Impulse connection 12L, breather connection G½", Customs tariff number: 84811019, origin Italy, length 254mm corresponding to S/N 201303107602 Pds: 1000 mbar (spring range 850 - 1400 mbar)
Pf4700530 Rem.Satz Druckreglers Dixi
Reparatursatz 204/A Pf4700014

- Freistehendes Regler Reflux 819 (Mit Pilot 204) Dn100 Ansi600 Rf
Pf4700532 Satz Ersatzteile
Fe 25
Der Regler Dival 600 Bp Dn-50, Max Durchfluss 980 M3/H
Fm0996223700e Wartungssatz La/Mp
???=0.115
St.497/A (Hnbr) Tn.074
36000183526
60030660
Ersatzteile-Set Vs/Am 65tr Fm0996614000a
F301520003ad
Fm0996336000b Rem.Satz Druckregler Dival
7409127 U-Ring
2620085
2006e01862 , By Dival600/G
7066004g (+7086172p)
Fmf1060600ba Filter Element For Filter
Norval/G 375tr Pn16
2622331 O-Ring
Aperflux 851
2620060 O-Ring
- Regler Mit Integriertem Monitor Reflux 819 (Mit Den Piloten 204) Dn50 Ansi600 Rf
4903291 Satz Ersatzteile
7200080 Alte Artikelnummer/Neue Artikelnummer 7686423
Reflux 819 Ansi600 Dn 25 7009042
Vs\am 65 G1 Sicherheitsventilder Ansprechdruck 345mbar
Fm0996224800a
Pf4904429 Wartungssatz Dival 600mp
Dival 160ap
Fe-10 Druckregler Gas Komplett
Reflux 819/Fo
Fm0996223700 E Wartungssatz La/Mp
7066005g
Tb437 Water Collection Hose

Vef
10606
Pf7066115g
Dn25x40
10609/F
6505252000
2620396
Fex1
Fm0996614000a Wartungssatz Vs/Am65trdn 25
2620038 O-Ring
21-25 Fe-25
60030860
7409066 U-Ring
Pf4904214 Ersatzteilsatz Dival 600 Bpbis Fabriknummer 201101647007dn40
Dival600/G
Hp100/B Ap
Vs/Am 65 Ventil (45 ... 65 Mbar) R 1 "x1"
36000183523
4900955 Wartungssatz R31/A
7086172p
Cf-500 Endkappe Drehbar Dn 500, Pn16
Pf4700014 Wartungssatz 204/A X Reval Ab2012
Norval/G 495 Pn16
Montage-Positionen 3 Und 4
7086108p / La/Tr 160 (Ce) Dvgw
2840246
10602 Gaskopplungsfilter 3/4 (Rmax = 0,6 Mpa)
Fe X1
Ersatzteilsatz 204/A Pf4700012
Vf-733
100m3 /21mbar
2624574 O-Ring
2622066
7066003

2620339 O-Ring
6015272 Bedienhebel Bf32 Dn100 - Dn125
7656018 Ausgleichmembrannorval/Dival250 Pos.: 209
Kit Dival G For 600 Gmp Model Gas Pressure Regulator
201504957931 Ersatzteilsatz Aperflux 851 (Basis)
2002g00005 (201279)
250m3 /300mbar
6015271 Hebelbedienhebel Bf32 Dn40 - Dn80
2840242 Cartridge (Filter-Abscheider Gas-Co2)
2000g03414 Gas Regulator
2620430 O-Ring
7012719
La/Tr-250 Shut-Off Valve/ Sicherheitsventil Absperrventil
304/A+ar100 Aperflux
2700525 Druckfeder Pd + 305
Trunnion 130-6/Fb Ansi600 Dn 100
Dival600/G 280tr Pn16/25 Dn 50
Membranen Fuer Gasregler Membran-Reval 182 Dn65-100 7656868
Vs/Am 58 Safety Valve Psr = 0.115, Pn1.6mpa
4904005 Wartungssatz Dival 600
2620360
Ed3721177
4903428 Wartungssatz 201/A-201/A/Mo
2620104
Rgl-075-1-G-16
4902561 Kit Reval 182+db+sb/102dvgwcedn2"1/2 Sr202/Sr656
La/Mp-250 Shut-Off Valve/ Sicherheitsventil Absperrventil
4901212
F30150
3822346
Dival 500 1
2620324

Fe25	
36000183524	
Vs/Am 58	
Fmf10608f1ba Filter Element For Filter	
7066004g	
Pf4905071 Wartungssatz Mod. 101 / Sb/82	
3806510	
10210/F	
La/Mp 512(Ce) Dvgw	
375tr+in/Tr Dn 50	
2620036	
9001200	
2006e02962	
Fexs Dn25 Pn16 Outlet:2-3kpa	
2620036 O-Ring	
Sav-Schaltger¼;T La/Tr 250 (Ce) Dvgw 7086172p	
7012600	
10603	
Fes-L-Zg	
4900374 Wartungssatz Bf32 Viton	
Dival600/G 280bp Pn16/25	Gas pressure regulator, PN 16/25, spring loaded, fail to open, CE tested according to DGR 2014/68 / EU and EN334, actuator housing GGG40, Actuator 280mm, Ps 20 bar to EN12186, Pe max 20 bar, Pa 15-90 mbar, design temperature -20 ° C / + 60 ° C, Operating temperature EN334 - 10 (-20) ° C / + 60 ° C, painting Actuator housing color: RAL9006, impulse connection 12L, Breathing connection G½ ", tariff number 84811019, origin Italy Overall length 183mm
2840242 Filterkartusche G4	
Fm7064206g	
60030460 Ventilbf 32 Pn16 Ce M. Gewinde	
7012594	
F30157/F	
8337020 Filterkartusche	
For 201404051025 201404051026 Repair Kit For The Dival 500 Tr Pressure Regulator	
F30051	
7012595 / Norval/G 375 Pn16 Dn65	
Reparatursatz Reval 182+db+sb/102 Dvgw-Ce Dn1/2 4902561	

6015904 Getriebe Typ Mg 984 Mit Handrad F. Bf&Bk	
For Norwal/G T.495 Control Repair Kit	
Reparatursatz R14/A Pf4700009	
6506230500 Membran Vs/Am65 Bp	
Fm0991001800a Filtermatte + O-Ring	
Dival 600g 280tr Dn40	
36000183525	
Fm0996614000a Ersatzteilsatz Vs/Am65tr	
2622264	
7086171p	
7016483g	
For 201404051027 Repair Kit La-Tp Safety Shut-Off Valve For Dival 500 Tr Pressure Regulator	
Vs/Am 65 Tr	
Dival600/G 280mp Pn16/25 Dn25	
St .495/A (Hnbr) Tn.074	
- Regler Mit Integriertem Monitor Reflux 819 (Mit Den Piloten 204) Dn100 Ansi600 Rf	
7086107p	SAV switching device LA / BP 160 (CE) DVGW with manual release, guiding areas Who 30 - 180 mbar, Whu 10 - 90 mbar, connection G¼ "resp. Cutting ring fitting 10L (12L)
2620400 O-Ring	
6015273 Bedienhebel Bf32 Dn150 - Dn200	
Repair Kit For Gas Pressure Regulator Of The Production Of Dival 512 Tr	
Pf4904422 Ersatzteilsatz Dival 600 Bpab Fabriknummer 201101647008dn 40	
204/A + R14/A X Reflux	
80230130	
2622331 O-Ring Ursprungsland: Italien Zolltarifnummer: 8481 9000	
2620072 O-Ring	
- Freistehendes Regler Reflux 819 (Mit Pilot 204) Dn50 Ansi600 Rf	
2623065	
4900381 Wartungssatz Bf31 Hycar	
64470038gi	
2840242 Filterkartusche G4 Ursprungsland: Italien Zolltarifnummer: 8481 9000	

2701040 Feder 40-85 Mbar
4900879 Satz Ersatzteile
7066007g / Dival600/G 280tr Pn16/25 / Nw: Dn40
Fm0996222200d Wartungssatz La/Mp
10607/F Filter Serie 106
Fes 50 Regler (= 0,31 Mpa, = 0,005 Mpa, Q = 35,7 M3 / H)
Vs/Am 65 Tr Sicherheitsventil Federbelastung 0,23 Mpa
G6 2840246
60031310
Fmf1060500ba Filter Element For Filter
182 Dn200 Pn16
Al021 Brush Mount
Vs/Am 65 Bp
Dival512/G 180mp
- Freistehendes Regler Reflux 819 (Mit Pilot 204) Dn80 Ansi600 Rf
60030760 Ventil; Dn 150 M Pn 1,6 Mpa
2006e02962 Regulator
375tr Arbeitsmembran7656816
204/A-204/A/Fo Reflux Pf4700012
4902404 Wartungssatz Reval 182dvgw+sb/101
2620374 O-Ring
4900955 Reparatursatz R31/A
250m3 /21mbar
Vs/Am65 644.70165 Safety Relief Valve Vs/Am65 644.70165 Du25 Tr2300-5000
Hp-100 Aprt
2006e01862 Model : La/Tr-250 , By Dival600/G
204a + R14/A Pilot
7012118
2623007
2620336 O-Ring
7066003g
375tr+in/Tr
8337020 Filterkartusche Ursprungsland: Italien

Zolltarifnummer: 8481_9000
7066001g
7086170p
Cf-400 Endkappe Drehbar Dn 400, Pn16
Fe25 Bp
Mo364 Brush Drive Motor
Pf4700400 Wartungssatz Norval 375
2006e01862 Obsolete, Replaced By Dival600/G Gas Regulator
Hp100/B Aprt
2620064
Kit1114 Mop Blade Sealent Gum Set
201504957941 Ersatzteilsatz Aperflux 851 (Basis)
7408041
Fmf10609f1ba Filter Element For Filter
10607/F
Fm0995216000c
For 281815999620
7013318 (+7050969cs10)
2620407 O-Ring
2620064 O-Ring
2620036 U-Ring
Veh
204a + R14/A Pilot Pressure Regulator
Pf4700521 Wartungssatz Sav
6015908 Getriebe Typ Mg50 Mit Handrad F. Bf31
Pf7066116g
Veg
7086098p
Norval/G 658 Pn16
For Fe25 Membran-Regler Auf Fe25
6506230500 Membrane La/Bp
7066007