


Rossi

Garanti: 12 ay
 Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin info@yursat.com.tr e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz. **Rossi** Markası, tedarik sresi iin ltfen bizimle iletiŐime geiniz.

Firmamız Rossi Trkiye Distribtr veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.

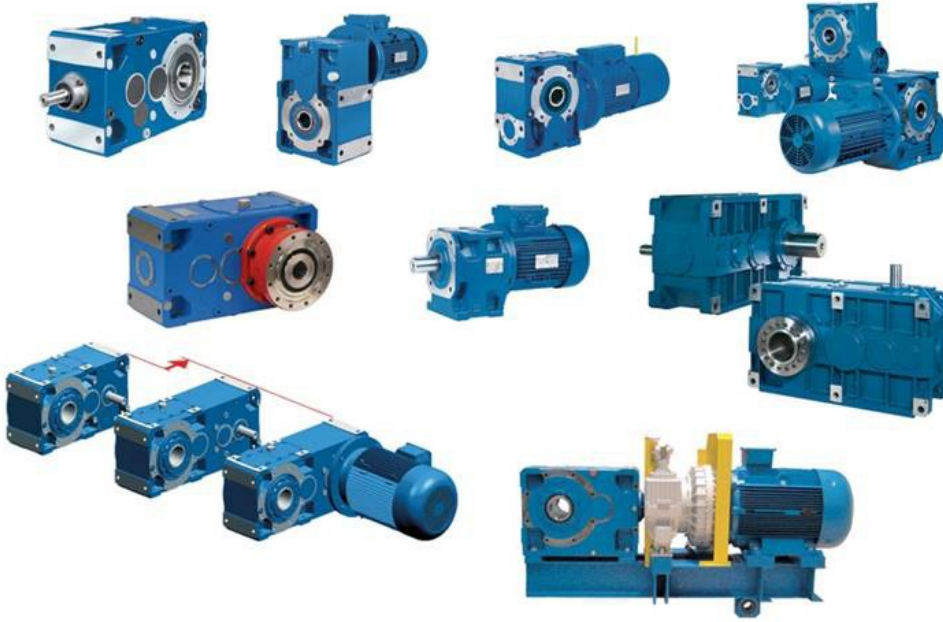

rn	Aıklama
MR IV 100 UO2A	Worm gear motor A cat Type B6 Without motor
GEARBOX. ROSSI RIDUTTORE,MRCI-80-U03A I=20.8	
GEARBOX. ROSSI RIDUTTORE MRCI 64 U03A/ I=25.2	
MR V 32 UO3A - 11x140 - 32	Worm gear motor A cat. Design V5 oversized. slow running. Hollow shaft diameter 20 (HM20) Gears with synthetic oil based on polyglycols for the Food industry Viscosity ISO VG 320 (type V5) Coupled to motor (terminal box position TB2) Motor Catalog TX (ErP) HB2 63B 4 230.400-50 B5 Pn [kW] = 0.18 Energy efficiency class.IE2 Identification plate 220.380-50 / 230.400-50 / 240.415-50 / 265.460-60 / 277.480-60 Plastic cable seal, mounted LOC, M20 e M16 (,PM31)
HB3Z 112M 4 230.400-50 B5A	Brake motor with DC brake Catalog TX (ErP) Pn [kW] = 4 Energy efficiency class.IE3 Identification plate 220.380-50 / 230.400-50 / 240.415-50 / 265.460-60 / 277.480-60 Manual air release lever with automat. Reset L (,L) Direct brake power supply 200 ÷ 440 V DS
RC 126P04R	
Cod.1332112000	BRAKE DISC BF-BZ 06S BERAL 1121
HBZ 112M,	Brake discs (4 pairs) It is shown in the 13th number in the list.
Pos. 13	
	Worm gear motor AS Cat. - STANDARDFIT Design B3 Fluorinated sealing

MR V 325 UO4E - 14x105 - 24	rings for high and low speed. Shaft (TV3) Coupled to motor Brake motor with DC brake Catalog TX (ErP) HB3Z 80B 4 230.400-50 B14R Pn [kW] = 0.75 Energy efficiency class. IE3 Type plate 220.380-50 / 230.400-50 / 240.415-50 / 265.460 -60 / 277.480-60 Direct brake power supply 110 ÷ 440 V DS
MR V 325 UO4E - 14x105 - 24 (without motor)	Worm gear motor AS Cat. - STANDARDFIT Type B3 Fluorinated sealing rings on high and low speed. Wave (TV3) Without motor
R 3EL 085A 167Y Z150M1 F05h I65x550 B5	Planetary gear motor EP catalogue Without motor
MR2I 63 uc2a	350 Per Min With a mixing fan(SI37,ColorOpoxi) With mixing couple with the motor Model HR2I100L4B5 3 bar,400 volt,3 kilowatt,1450 rotation per min
12060205	
MR IV 63UO3AB5V6N°13.8I102HB71B4	
Brake disc	
MR V 50 UO3A - 19x200 - 20	Type B6 B5 flange (F1) Without motor
MR 3I 40 FC1A - 14x160 - 40,5	Design V1 High drive speed (N) Without motor
Motor catalog TX (ErP)	HB 80C 6 230.400-50 B5 Pn [kW] = 0,75 Intermittent Duty S3-70% Nameplate 230.400-50 / 265.460-60
Helical gearmotor catalog G	MR 4I 100 UP2A - 19x200 - 163 Mounting position B6 Without motor
MR CI 100 UO3A - 38x300 - 12,4	Bevel helical geared motor Catalog G Type B3 Without motor
RCI 160 UO2A / 6,27 F.C.V6	
MR ICI 100 UO3A	Bevel helical geared motor MR ICI 100 UO3A - 24x200 - 31,4 Without motor Katalog G
1" ROSS WALF 3/2	
1/2" ROSS 3/2 VALF	
1/4" ROSS 3/2 VALF	
MR3I280UP2A	
Code : MR 2E 112 F C 2 L N i=	35 24x50 M8 130 110 B5 S5
R V 40 UO3D - 10	Worm gear A cat. R V 40 UO3D - 10 Design V5 Drive speed n1 = 280 - 1800 min-1
MRCI63 UO3A,I:6.31,24,145	
Worm servo gearbox catalog SR13	MR V 50 UO3A / 32 - P04 19x40 Type B3-B8 Drive coupling dimensions (M1,N1,F1): 130, 110, M8 Without motor
Worm gear motor A cat.	MR IV 63 UO3A - 14x160 - 152 Design V5 Coupled with engine Brake motor with GS brake catalog TX (ErP) HB2Z 71B 4 230.400-50 B5 Pn [kW] = 0.37 Energy efficiency class IE2 Nameplate 220.380-50 / 230.400-50 / 240,415-50 / 265,460-60 / 277,480-60 Direct brake supply 110 ÷ 440 V DS
RCI200 UO2A	TV1 510
RC00024525	MULTI-VOLTAGE EQUAL RM2 PLUS HBHBV-HBZ
RCI200 UO2A	TV1 510
Bevel gear motor L99 Cat.	MR C 125 PO1H - D. 38-300 / 2 Design B3 Without motor
MOT. 3+ HB 80B 6 B5 ? NR ICI 64 UO3A-	2510708073 2510708116

19X200	
HBZ 63B 4 B5	
REDUCER BODY ROSSI MR IV 80 UO3A	
MR IV 100 UO2A R000019605	
R000019605 PINION AND GROUND	
MR IV 80 UO3A R000025323	
R V 40 UO3D - 10	Worm gear A Cat. R V 40 UO3D - 10 Design V5 Input speed n1 = 280 - 1800 min-1
W6077B3401Y 24VDC	
1500rpm B5	
Mrci 100 Uo3a-112	
Hbz 132mb 6 B3	
5 Res 160 S4 B5	
3ma71b4b5codtmo708494	
Mr 3i 126 Uc2a	
Motorhaube Vorne - Neuer Typ	3 KW
N.664795.E	
Mr Ci 160 Uo2a	
Mrc2120uo2a+cps132m25	
R Ci 80 Uo3a	
R C2i 280 Uo2a	
R21 160 Up 2a 6.41 B3 98kw	
V35x8	
R3i100uc2a/29	
Mrv80uo3a 230.400	
Res 132 M4	
Rr1-Rw1	
Mr1v100u02a-90s4	
Mr3180fc1a+fv0905212b5	
Mr3140pc1a	
Mr2i 125 Up2a I 6.53 5res 132 M4 B5 Ip55	
Pignone 5.65	
Mrci 80 Uo3a 601	
132m 4 230.400-50 B5	
Mr 3i 125 Up2a B3 C/W	
Rm2 Plus-Hb	
Mr Iv 100 Uo2a-100	

Mr3i63uc2a-90lc4	
Motore Rossi	
Mr-3i-125up2a 12m4	
Mr 2i 125 Uc2a - Hb3 160l 4 - B5 / 88,2	
Rd1	
Lr341-61-068	
1001074	
Hbz 180l 4 400-50 B5	
D32-380/56-40	
4.418.103.117	
R 3eb 001a 43,4y Z040m1 F05a I24x200 B52	
Mr 3i 63 Uc2a 602	
Bc 16 178 75	
Sr13 Mr 3i 80 Uc2a	
Mr3180pcia80v6	
Mrv160uo2a	
Hb2 132 Mb6	
Hintere Motorabdeckung - Alter Typ	3 KW
Hf132mc4 11kw B5 F Ip55 S1 No.35364706	
Hintere Motorabdeckung - Neuer Typ	3 KW
Rc2i160uo2hs	
Mr C2i 225 Uo2v	
Mrv80u03df08be	
Mrv1v63uo2a+fo80a6b5	
Motorhaube Vorne - Alter Typ	3 KW
Wa 893269	
Mr2i 80	
5res 200m 6	
Mrv63u03a-80ba	
Mr 2i 51 Uc2a - Hb2 90l 4 230.400-50 B5 / 145	
Mr 2i 101 Uc2a - Hb3 160l 4 - B5 / 178	
Mr Iv 161	
Mr Ici 63 Uo3a-14x160	
N.664796.F	
Mr Ci 81 Uo3a	

Mrci81uo3a	
Mr3101uca2	
R31200up2ab3	
Rc2i140u02hs	
Mr3i125pc1a112m6	
Hbz 80b 4 230.400-50 B5	
Rv 050 Uo3a/63	
Mr 3i 63 Uc2a - Hb2 90l 4 230.400-50 B5 / 84,7	
Mr 3i 180 Up2a	
Mr V 63 Uo3a	Worm geared motor A Cat. MR V 63 UO3A - 14x160 - 40 Type B3-B8 Without motor
Hrci63403a294v519160	
5 Res 132 M4	
G05mrci140uo2a-Hbz132mc 6	
5ref 200m 6	
R 2eb 002a	
R 31 160up2a 102	
V62x10	
Hff 80b 4 B5 + Mr 315 Pce	
Mr Ci 80 Uo3a	
Mriv125po2acf100la4	
Rr1 440	
06mc80-10	
Mr 3i 81 Uc2a	
R31 280 Up2d/32.5-B6	
Mr-C1-81-U03a-100	
Mr2140fc1a29411140	
Mr31 160 Uc2a-5res 200m 6 277	
Mr 2i 81 Uc2a - Hb3 132m 4 - B5 / 187	
Hb 71c 2 230.400-50 B5	Motor Katalog TX (ErP) Pn [kW] = 0,75 Aussetzbetrieb S3-70% Typenschild 230.400-50 / 265.460-60 Thermistor-Thermof¼hler (Grenzwert 150 ¼C) (,T15)
Mriv80uo3a 80a4	
Mr3i80uc2a	
Mr V 325 Uo4e 417	SIEHE ANHANG
Mriv80u02a+fo71b/1b5	
132l 4 230.400-50 B5	

[Pignone 5.65 A](#)