




BALLAST TECHNICAL DATA

for fluorescent lamps

36W

Technical product details

Type		RP-236/1
Number of lamps		1 to 2
Rated Ballast-Lamp Power	W	36
Input voltage	V	220 to 240V
Input frequency	Hz	50 to 60
Inrush current Peak	A	Max 18A
Power Factor 100% Load (Nom)	W	0,96
Energy Efficiency		A2
T-Ambient (max –min)		+50°C -15°C
Ballast weight	kg	0,215
Ignition Method		Cold Start

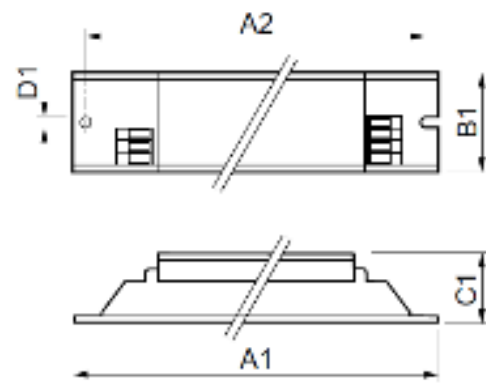

Dimensions in mm	
D1	4,2
C1	28,0
A1	280,0
A2	265,0
B1	30,0